



## MAXHUB Collaboration Display

The V6 Classic Series

MAXHUB




# Refine Meeting Efficiency

Integrating professional video conferencing, seamless screen-sharing, advanced whiteboard technology, and a brilliant audiovisual experience, the MAXHUB V6 Classic Series is the ultimate corporate-collaboration assistant. Drive productive teamwork and increase organizational efficiency with this meeting-room must-have.



AI noise reduction



10th Gen Intel CPU



$\Delta E \leq 2$  professional-grade color accuracy



90% NTSC color gamut



92° HFOV



Auto-Framing



8-meter voice pickup range



48MP camera



Antibacterial design



MAXHUB OS 6.0



## Total Solution, Minimal Setup

A complete, seamless design fulfills every meeting requirement, including built-in camera, mic, and touch panel. Whether video conferencing or hosting a local discussion, it's as easy as plugging in your power cable.








## Distinguish Every Detail in Ultra-HD

Experience 1.07 billion colors in brilliant detail with high-color gamut and ultra-HD, 4K display, promising a professional-grade image quality. Zero-bonding technology effectively reduces air refraction and parallax for enhanced visual clarity.



**View Vibrant Deep Colors**

90% NTSC high-color gamut, compatible with a variety of color spaces. The V6 Classic Series offers color gamut restoration across a variety of formats, including presentations, printed documents, and video clips.




**Never Worry about Scratches**

High-strength, anti-glare, tempered glass significantly reduces scratches in over time use. Poor lighting is no longer an issue during conferencing – the screen remains bright, displaying intricate detail.



**Vivid Imagery with  $\Delta E \leq 2$  high-color-accuracy Display**

Pre-calibrated before delivery to restore the original color and achieve professional-grade imagery.





## Advanced, Intuitive Video Conferencing

Experience next-level video conferencing with a wide field of vision, and crystal-clear, amplified audio. Thanks to auto-framing, the V6 Classic Series intuitively adjusts to the number of meeting participants and their location.







Sony 1/2-inch Sensor      92° HFOV      WDR Dynamic Anti-Backlight

The newly upgraded 48MP camera ensures crisp detail during multi-participant video conferencing, while its 92° HFOV ultra-wide-angle lens expands the field of view to achieve a panoramic perspective. WDR Dynamic Anti-Backlight technology maintains ideal lighting contrast, preserving image clarity even under extreme lighting conditions.



Auto-Framing

With auto-framing, the display automatically adjusts to achieve the best angle based on the number of participants and their location, so it feels like a face-to-face interaction.

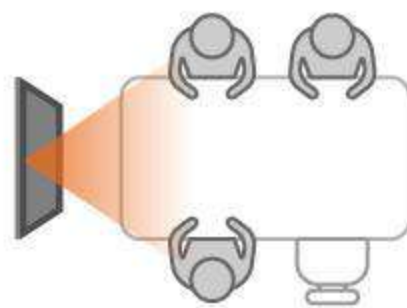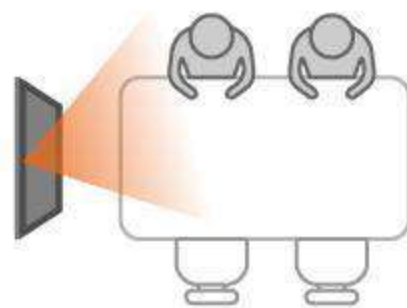

\*Supports up to 30 people. Working distance within 10 meters.

Speaker-Tracking

Using speaker-tracking technology, 8 microphones locate the sound source in real time, ensuring the speaker is always the center of attention.







## Exceptional Voice Clarity

- 8 non-equidistant microphone arrays
- Built-in AI noise reduction
- 2.1 channel stereo sound
- 2x10W+20W (subwoofer) seam speakers

The V6 Classic Series microphone supports 8-meter, 180° wide-angle voice pickup, while AI noise-reduction technology enhances the human voice, filtering interference. Designed with powerful seam speakers, exceptional voice clarity is guaranteed.



# Easy, Wireless Screen-sharing



The V6 Classic Series' dual Wi-Fi modules simultaneously support a screen-sharing hotspot and Wi-Fi network connection. With low image latency, you'll enjoy a faster, more stable connection, and a superb screen-sharing experience.






There's no need to rely on virtual-meeting platforms to share your screen. The V6 Classic Series supports multiple screen-sharing methods, including our built-in MAXHUB Share software, Miracast, AirPlay, and Chromecast. Cast to the V6 Classic Series quickly and wirelessly from any PC or mobile device.

Using MAXHUB Share, screen-share wirelessly from up to 4 devices simultaneously. The V6 Classic Series' low latency preserves its 4K resolution, maintaining critical detail while enhancing the visual experience.

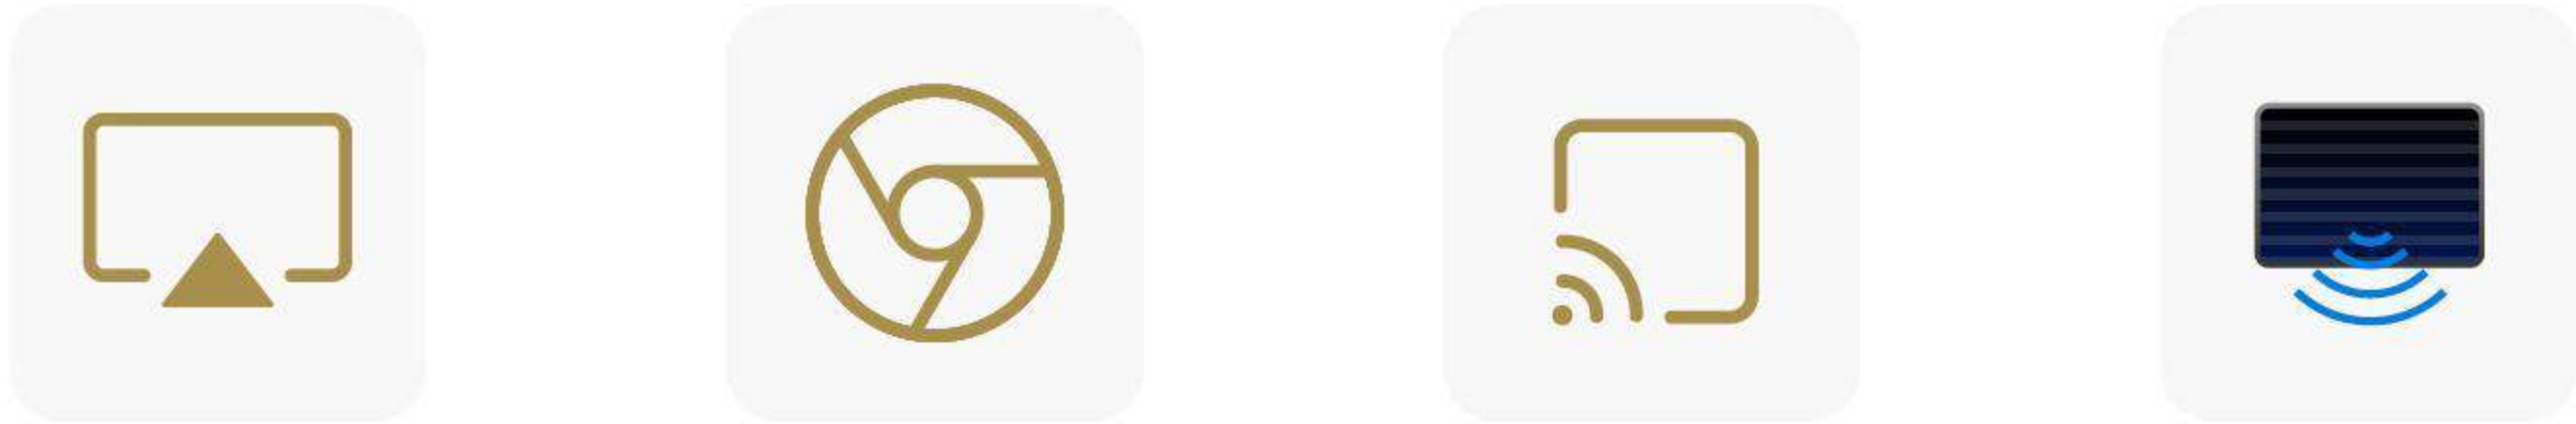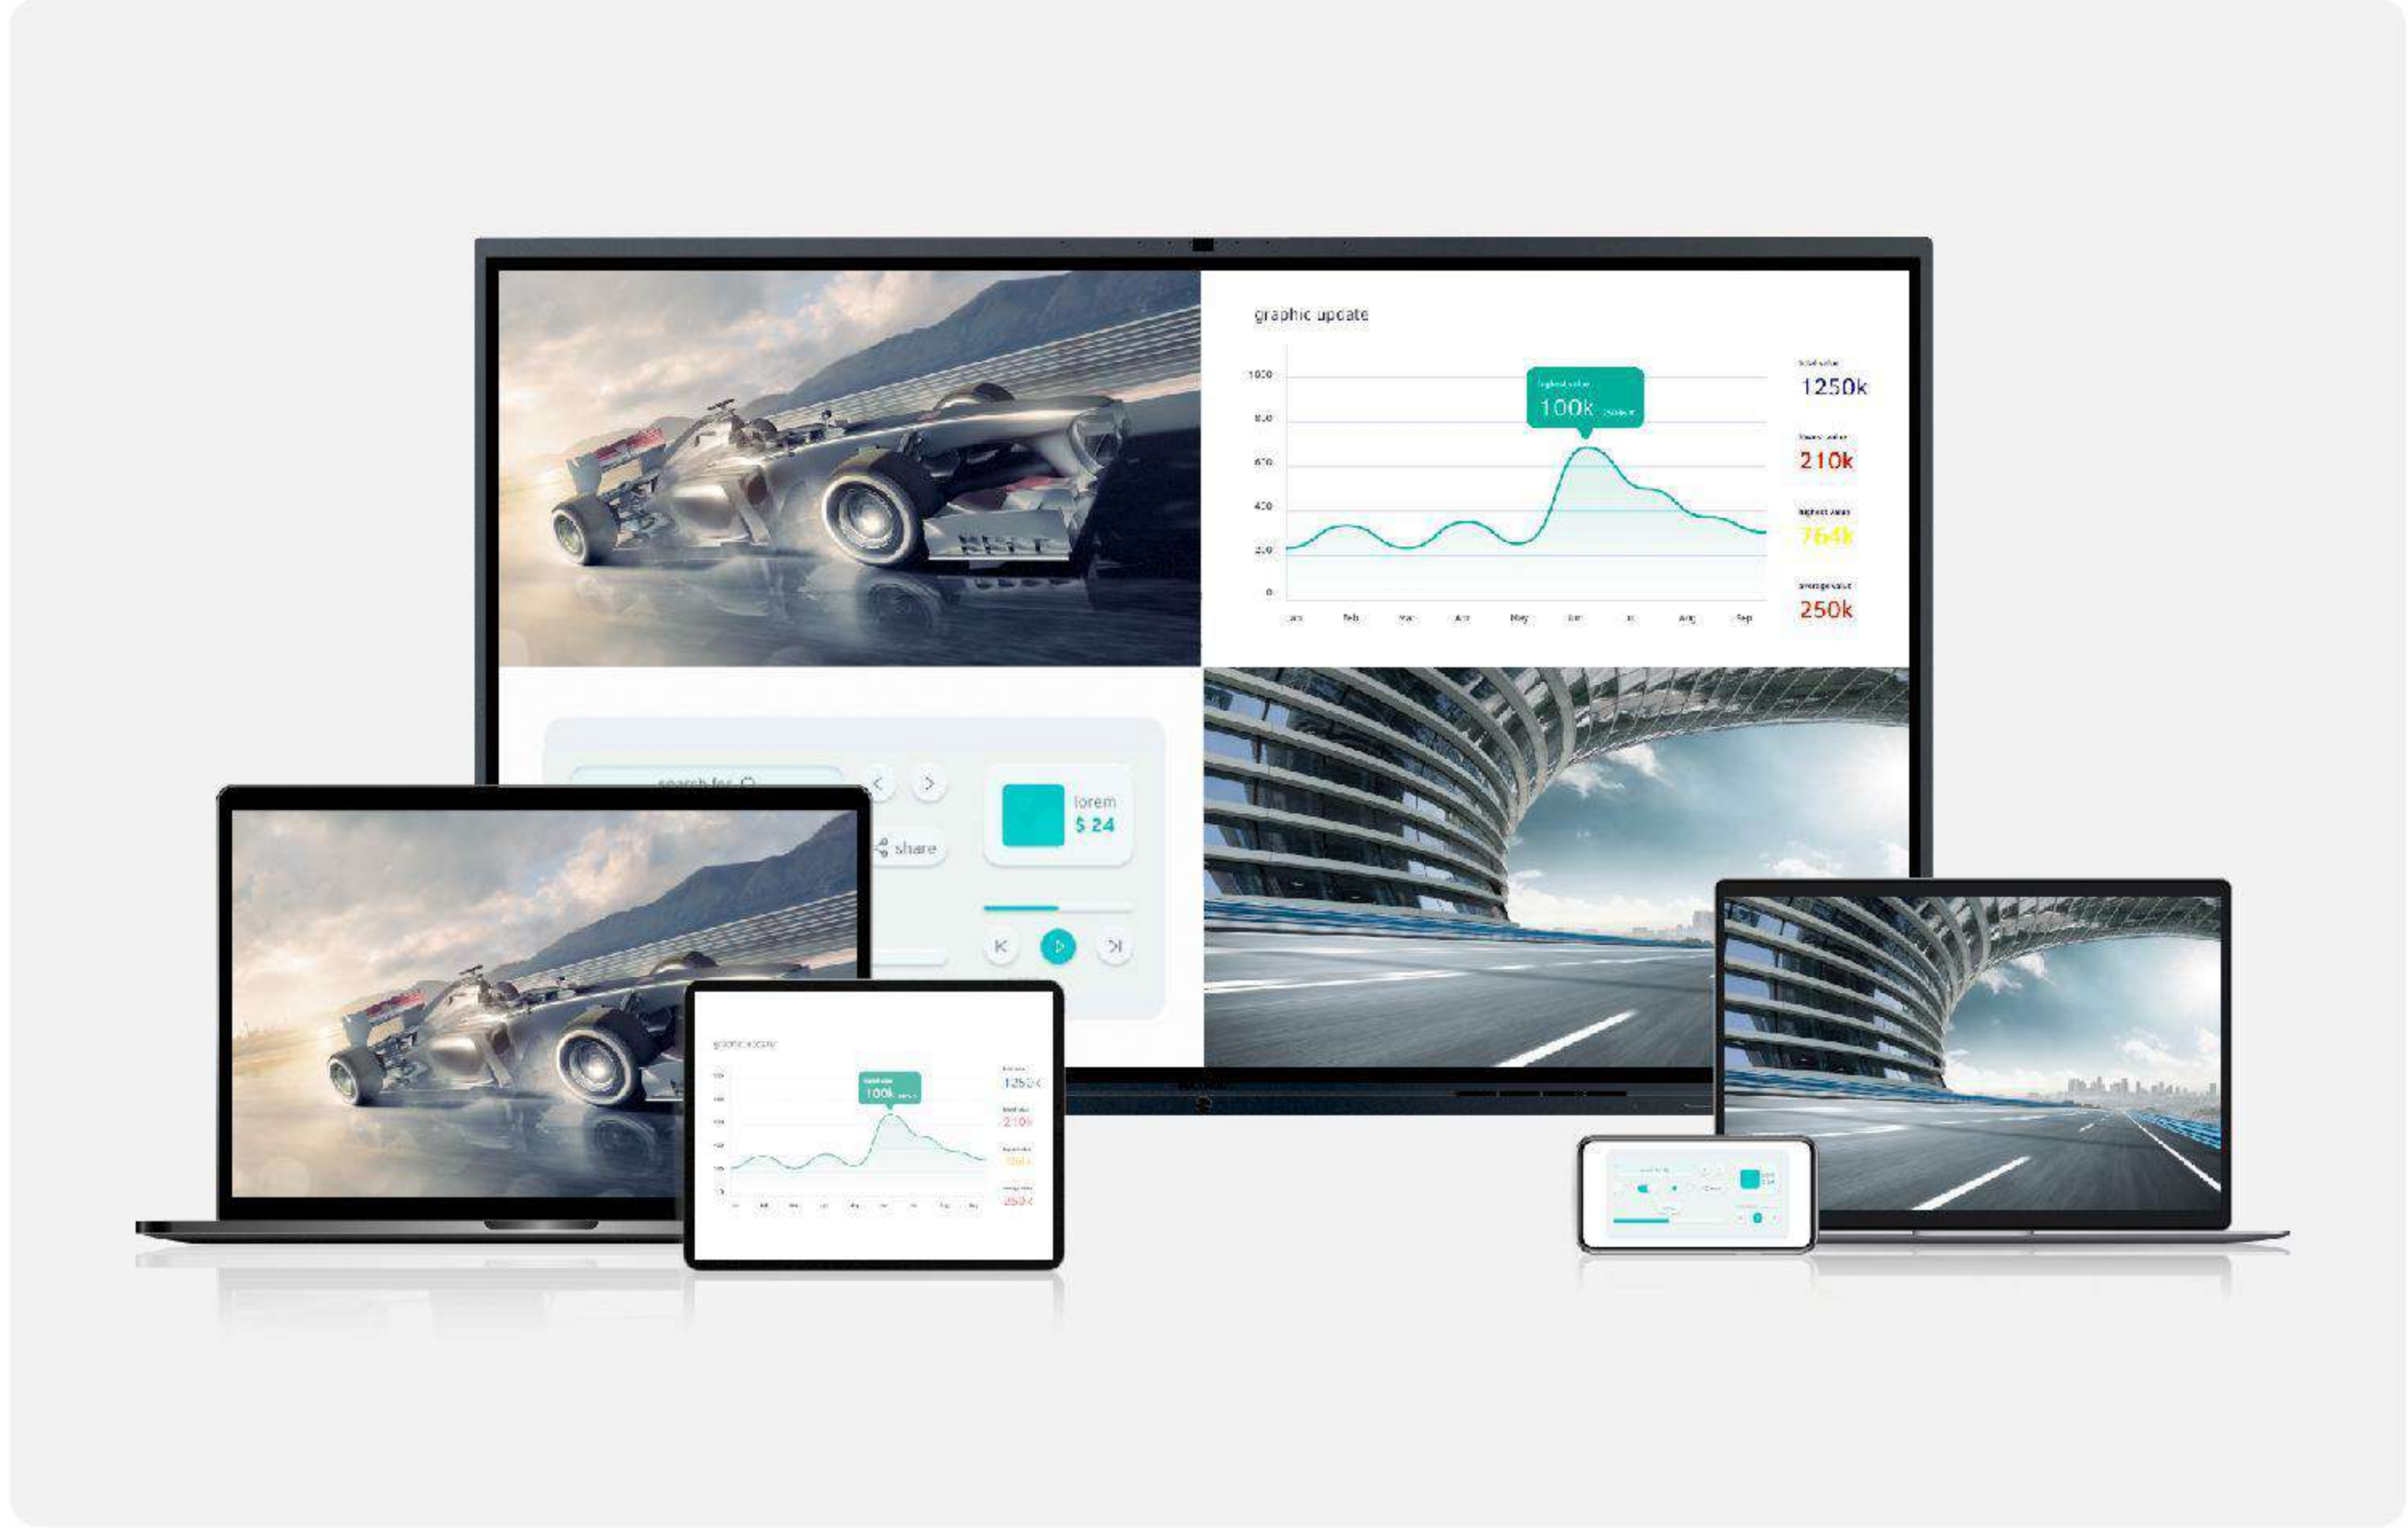


The V6 Classic Series allows for greater flexibility during presentations – turn pages and annotate directly on the touchscreen or manage the panel from your own device while seated.

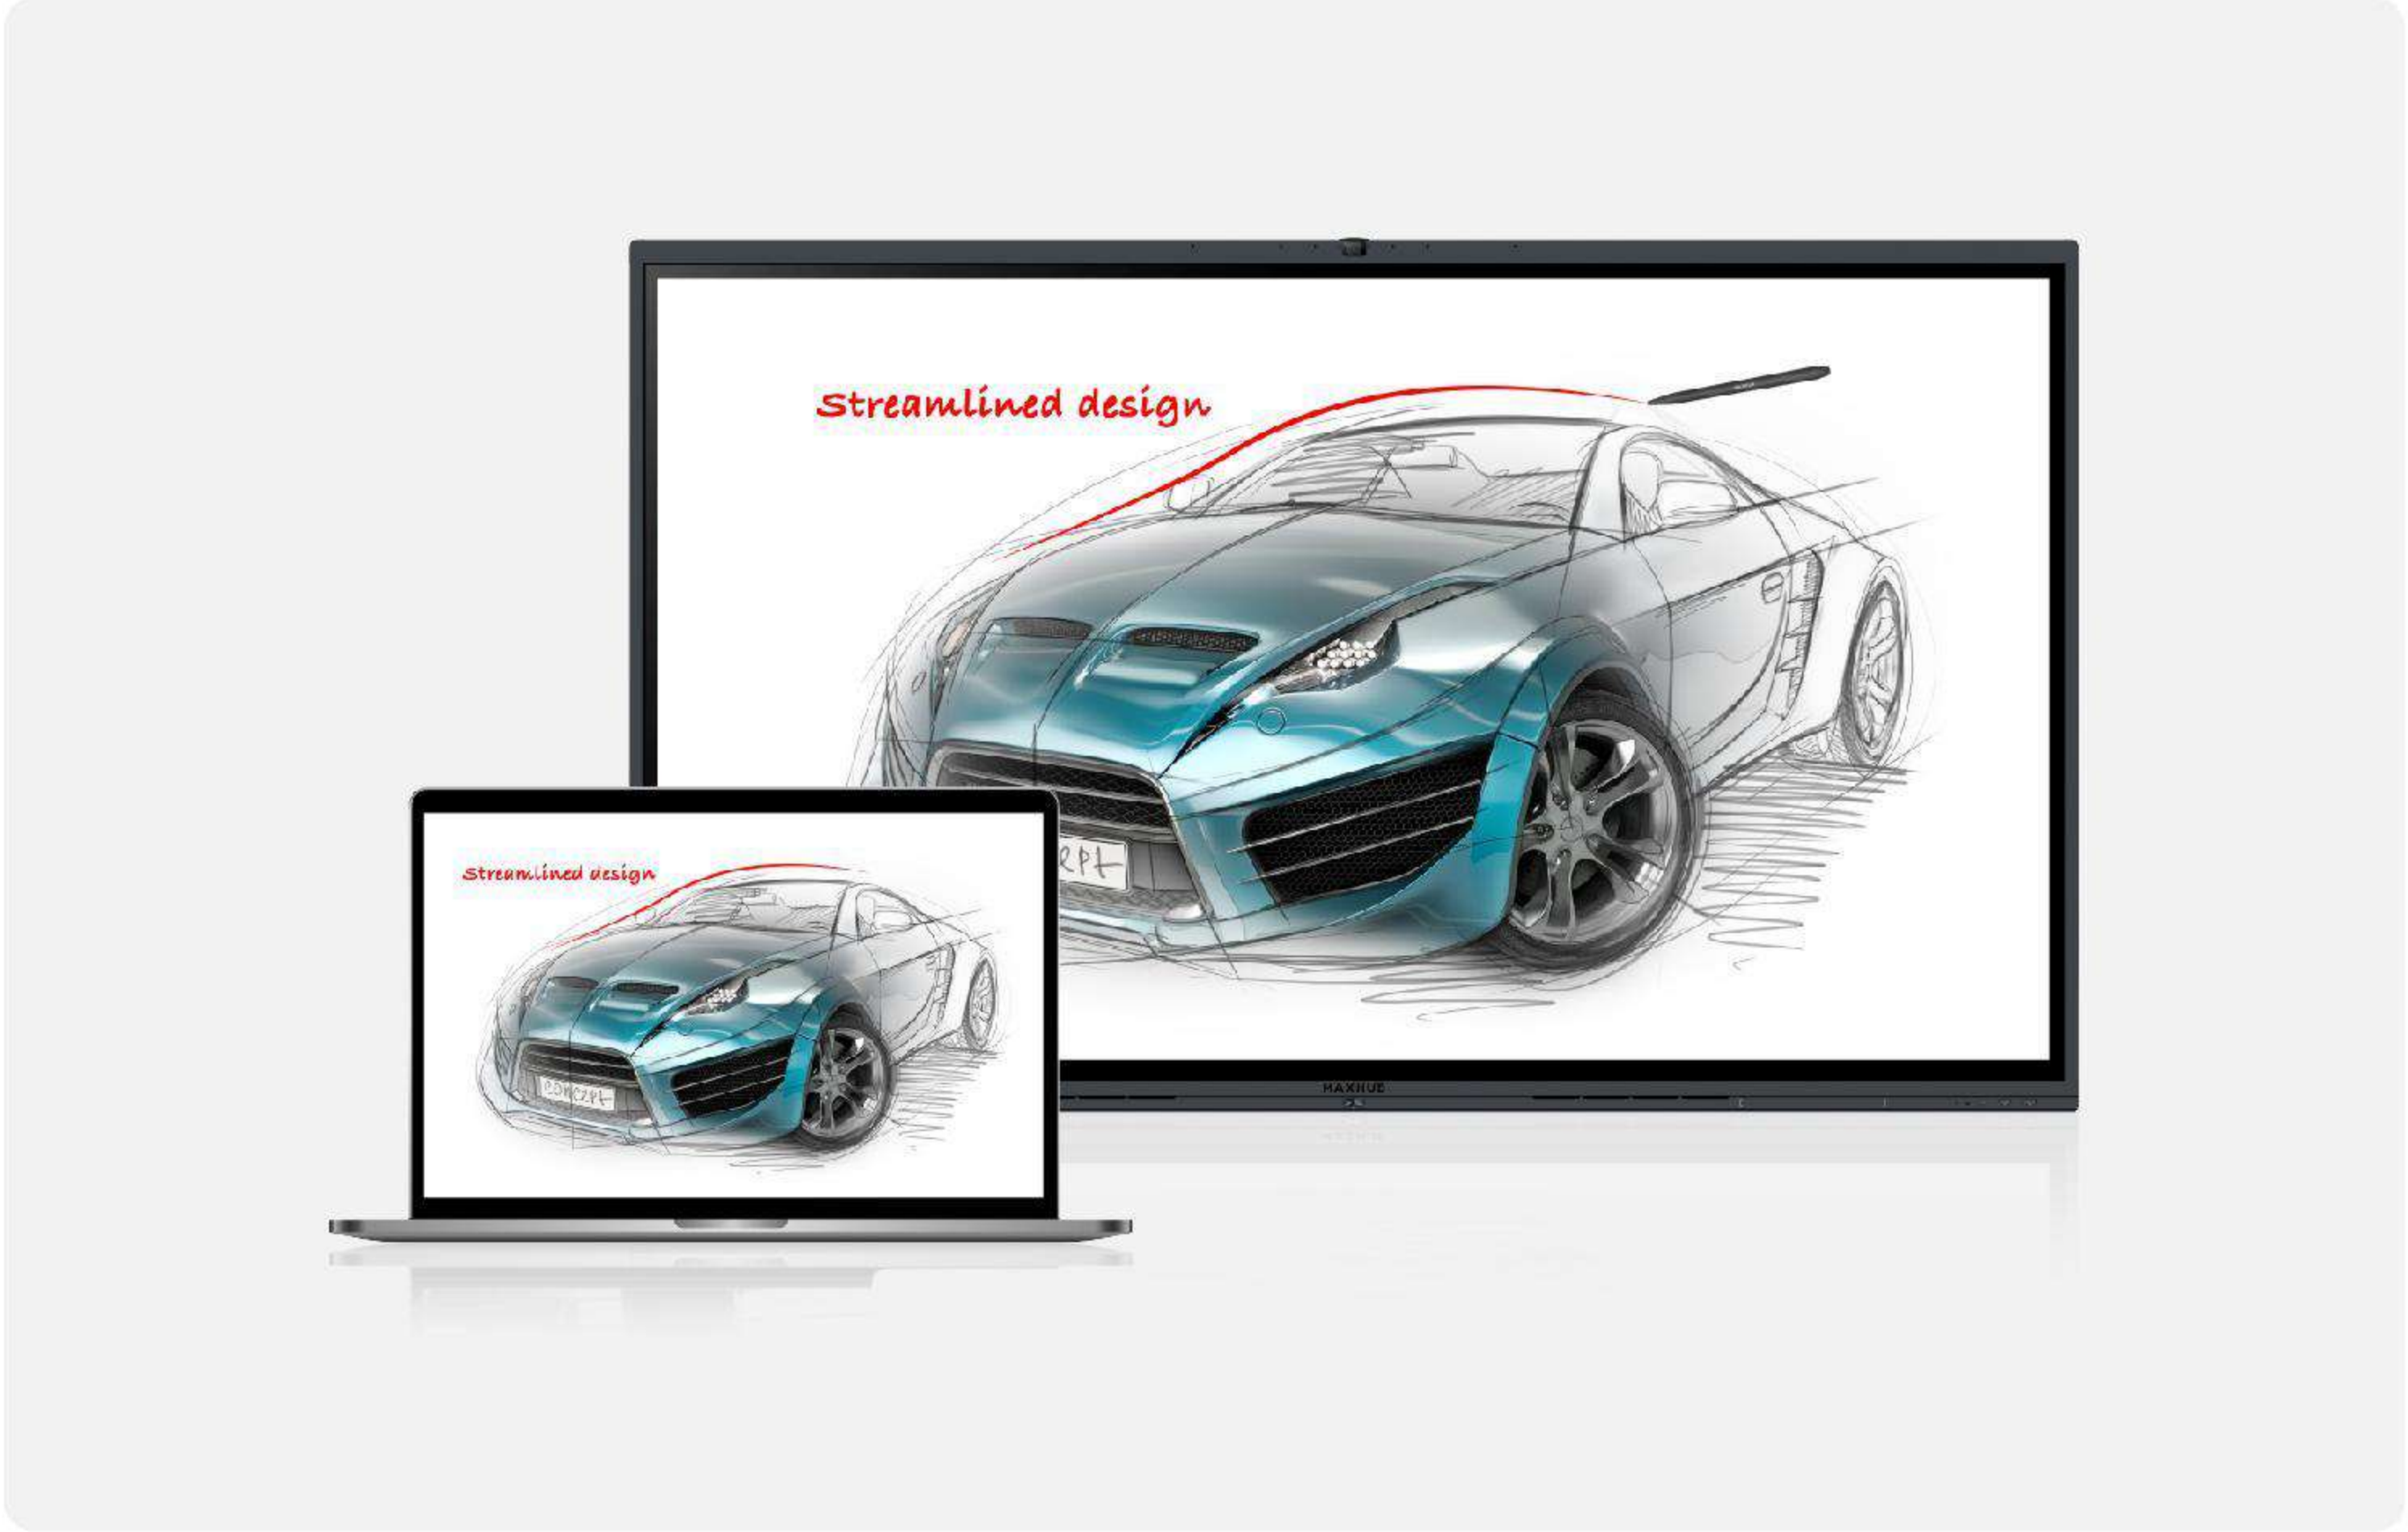



# Efficient, Inspired Brainstorming

Start the whiteboard with just one click and dive into creative, efficient brainstorming. Equipped with 20 touch points, the device supports two people writing simultaneously and comes with a variety of pre-installed graphic templates.

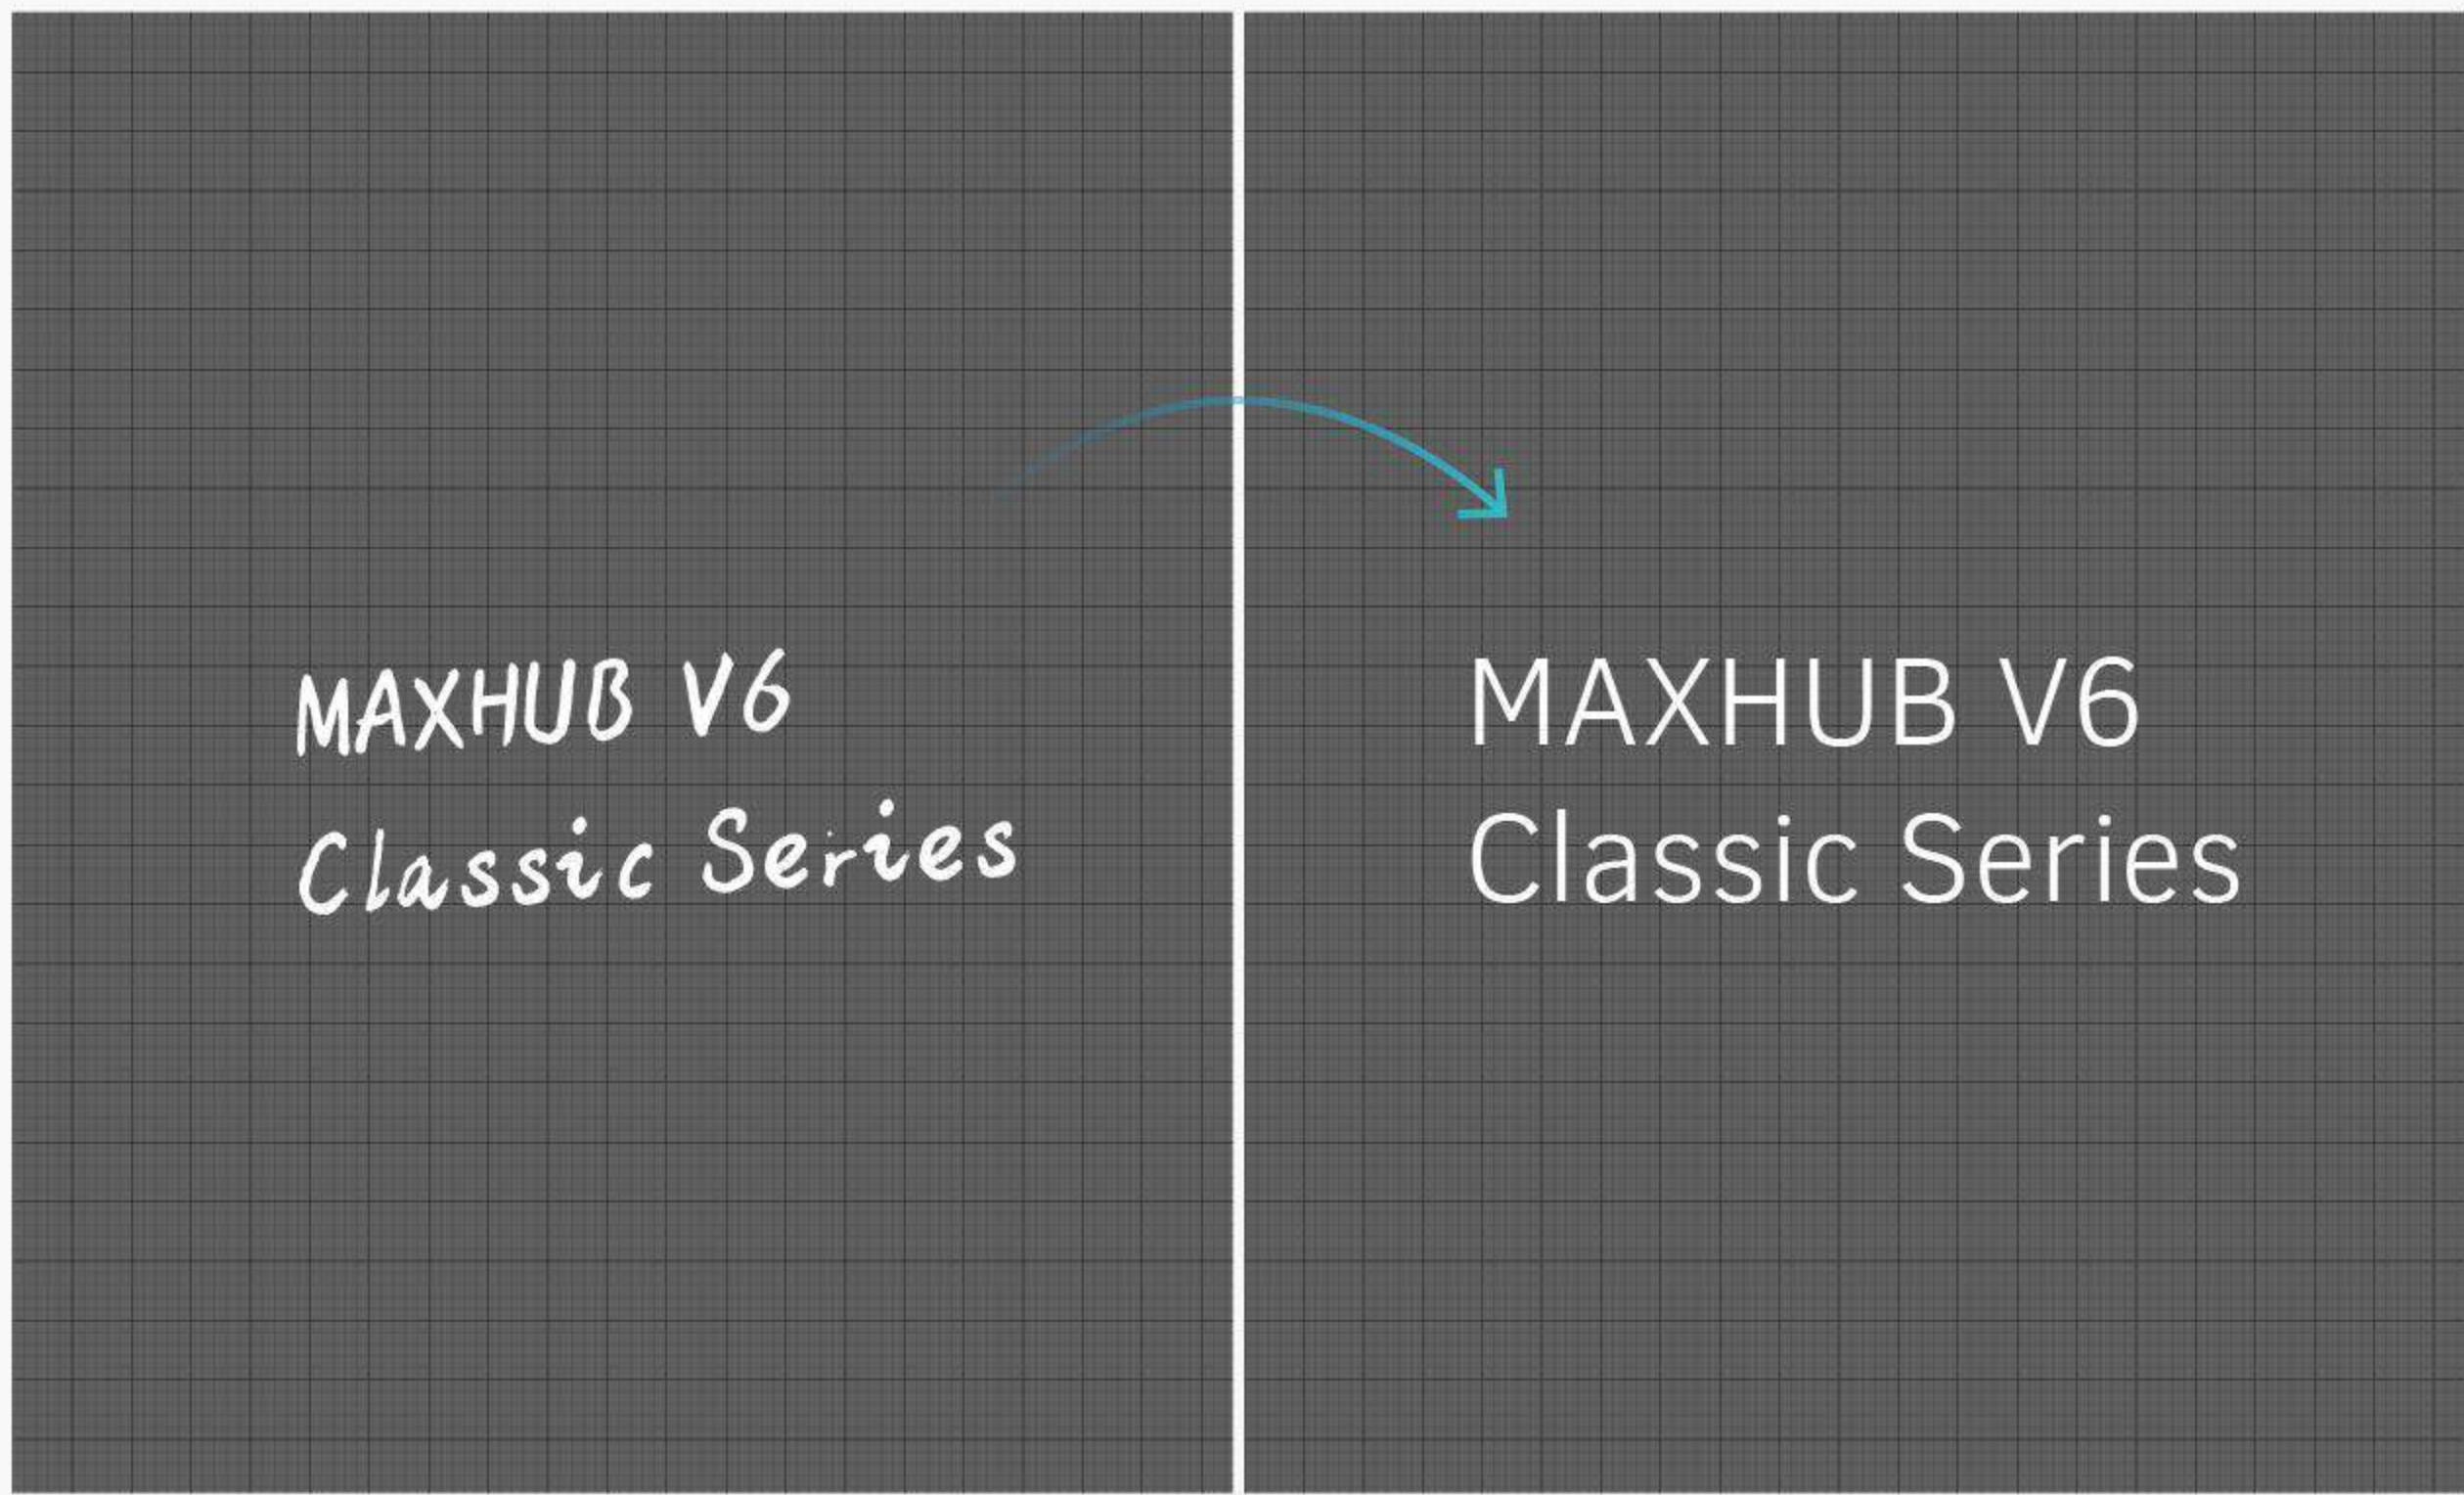

Smart Optical Character Recognition (OCR) technology allows you to easily convert handwritten text to print.



Recording your meetings has never been more efficient. Scan the code and deliver all the meeting minutes, including annotations, to your mailbox – with just one click.





## Syncs Perfectly with Your Devices


The V6 Classic Series' front-facing Type-C interface design allows you to cast from and control your own devices through the touchscreen. You can also use its camera, microphone, and speakers directly from your laptop. A 1.8m Type-C cable is included in the package.

**Wired screen-sharing requires just one Type-C cable – it's that easy.**




### Control Your Devices Through The Touchscreen

No more back and forth from your seat during presentations – project content via your laptop directly to the display and operate your laptop using the touchscreen display.

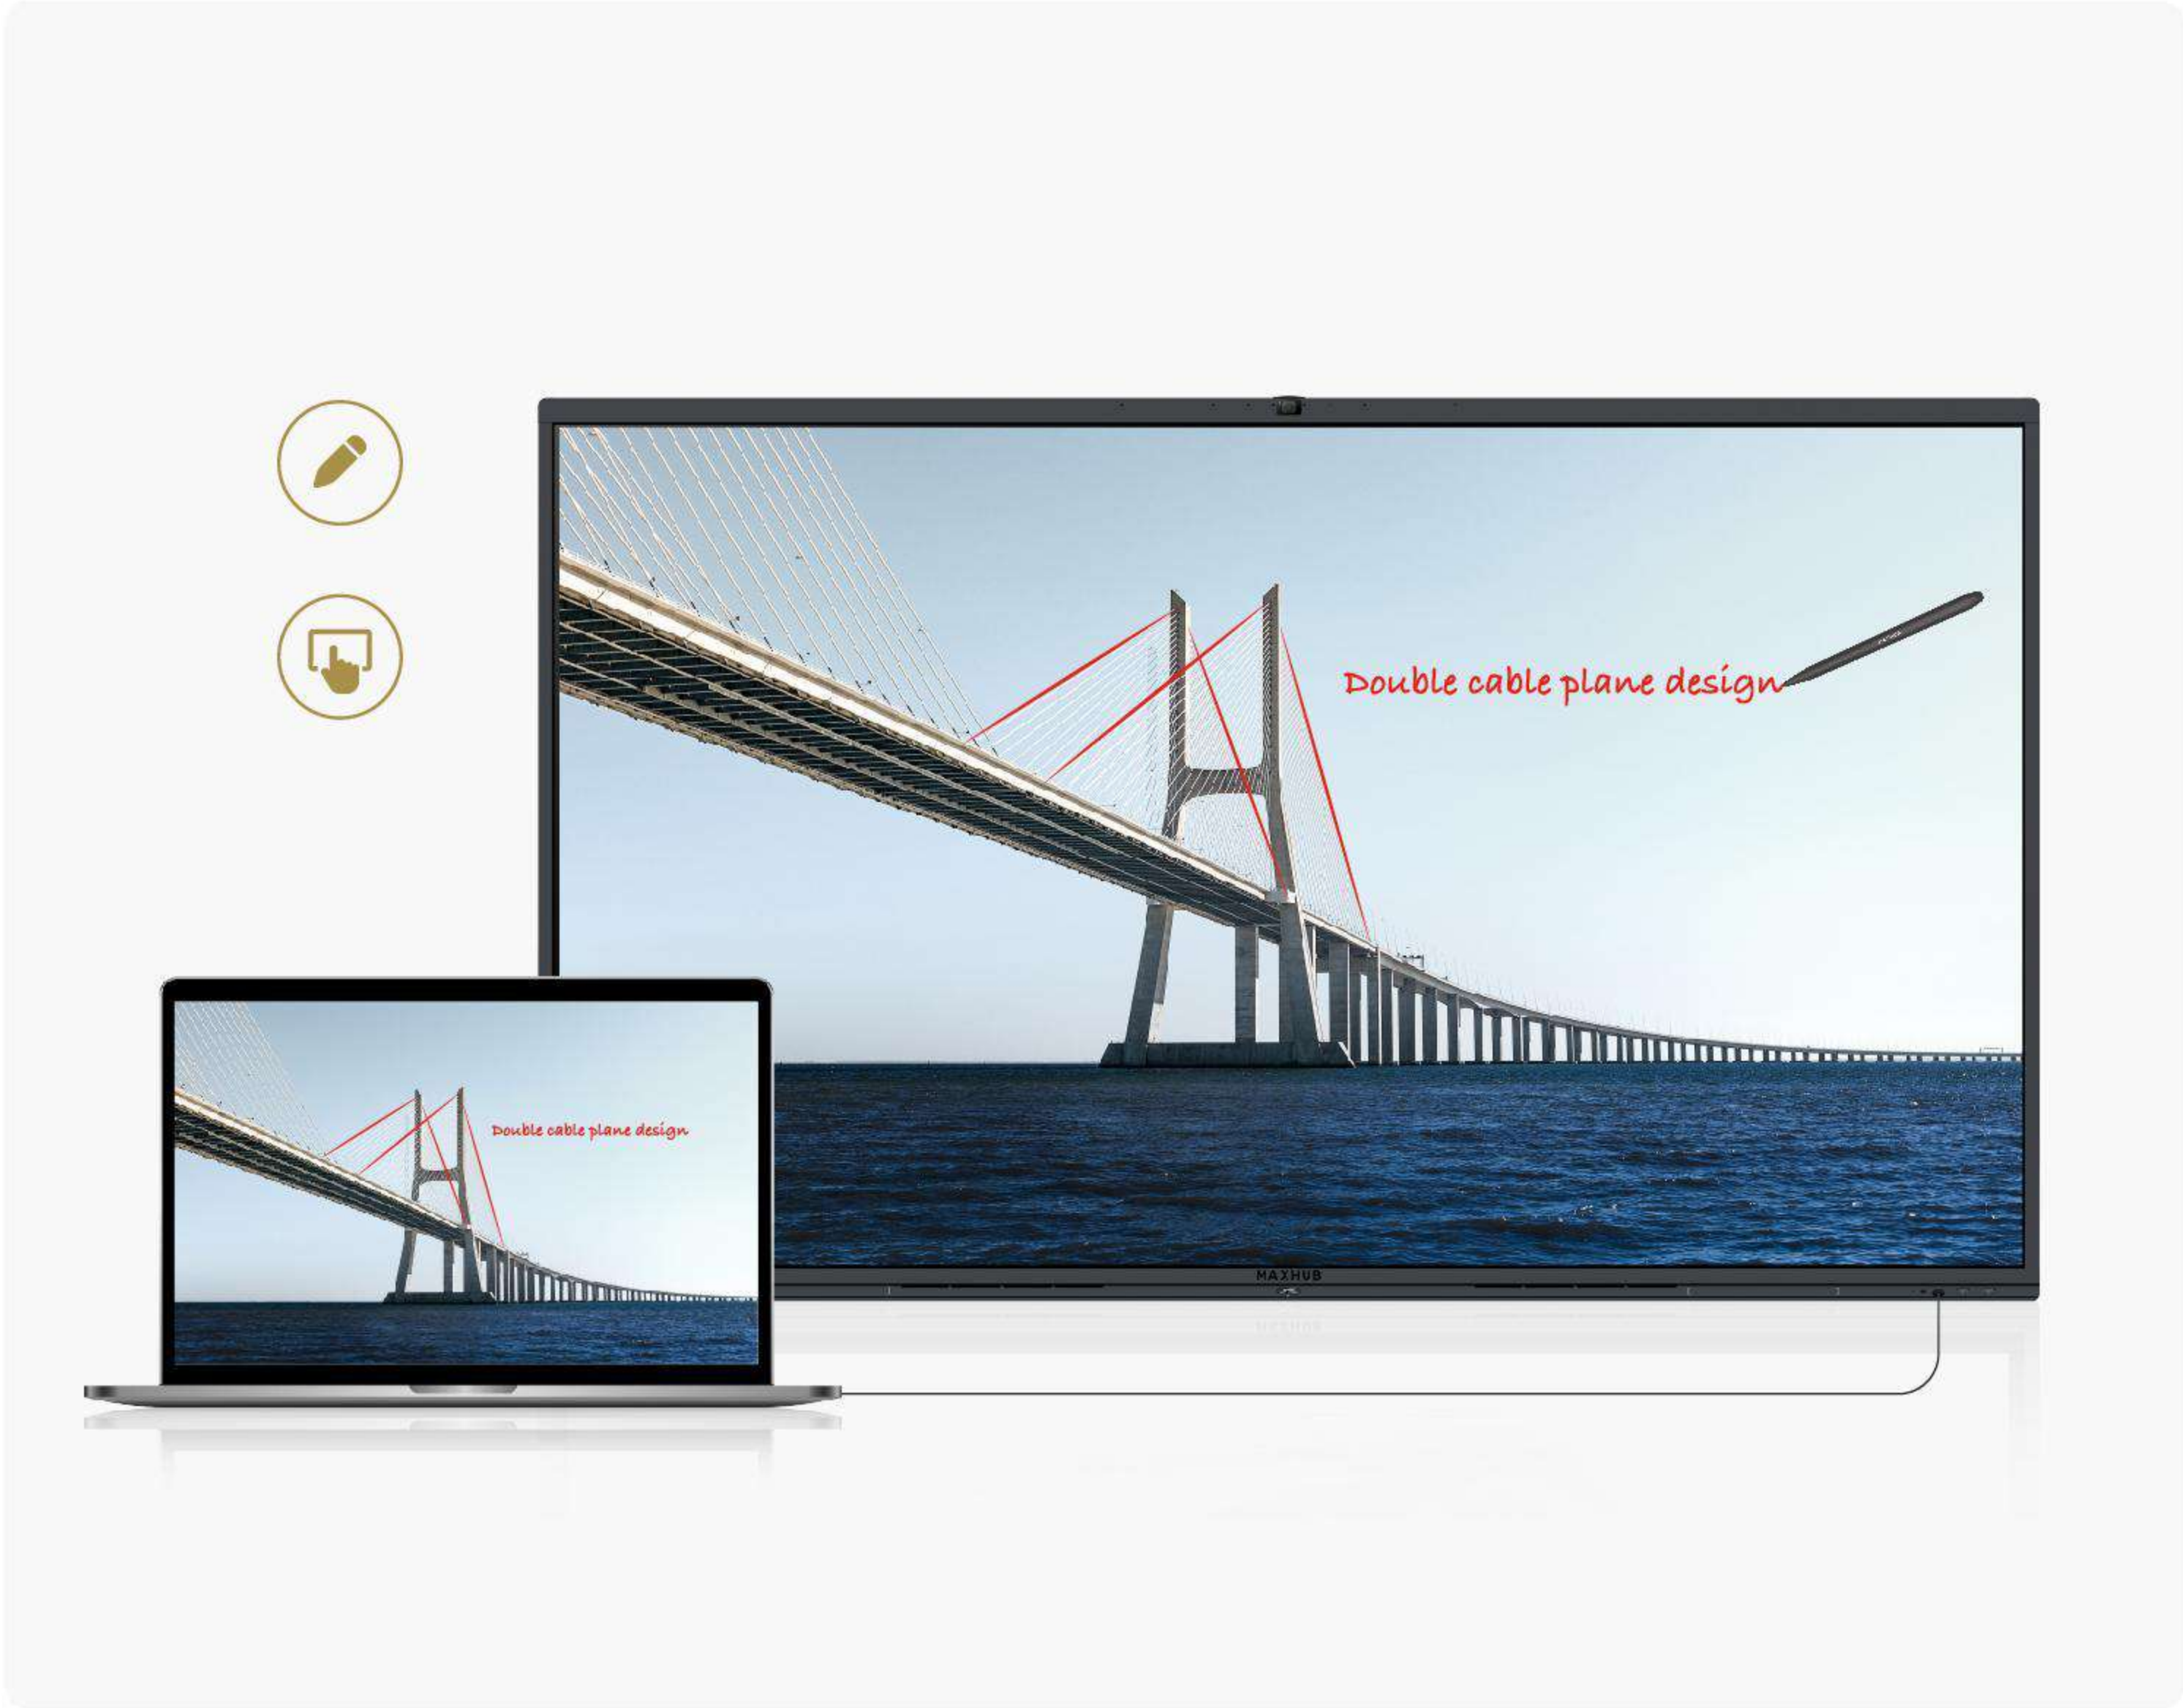

### Bring Your Own Device (BYOD)


Access the panel's camera, microphone, and speakers directly when you start a meeting from your laptop.

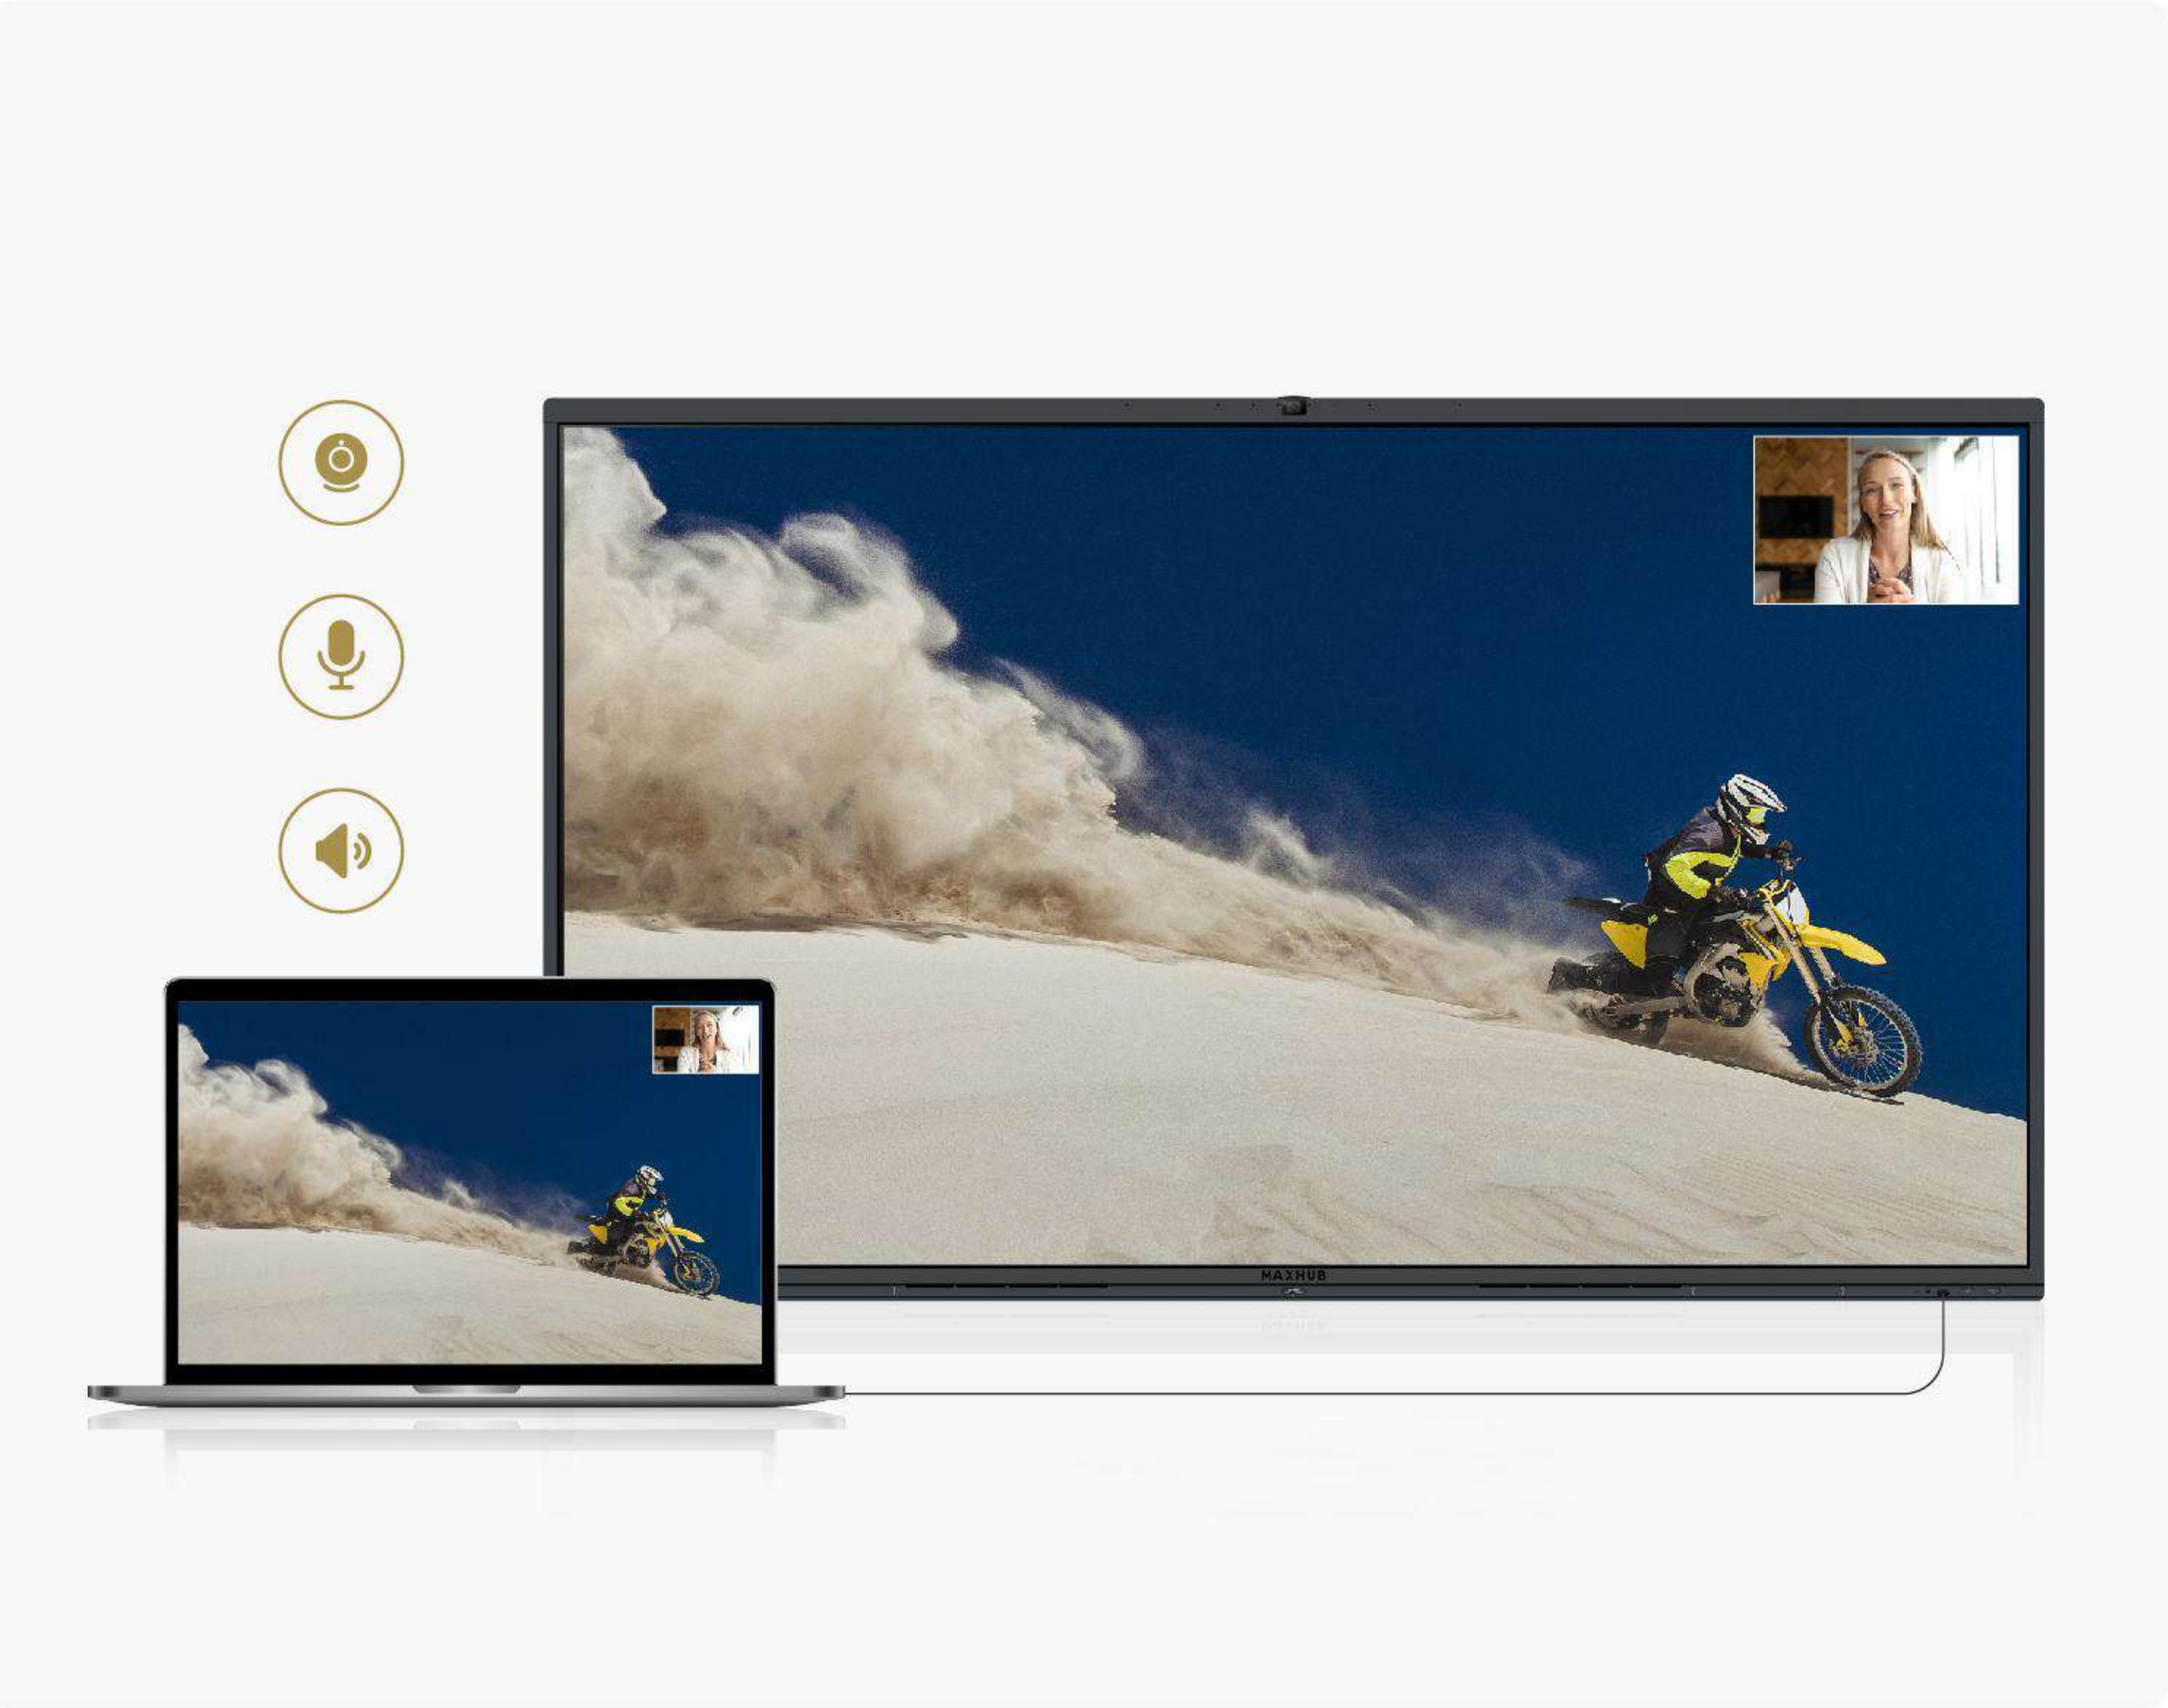



## Prioritizing Healthcare

Antibacterial glass, antibacterial passive styluses, and an antibacterial power button keeps you safe.

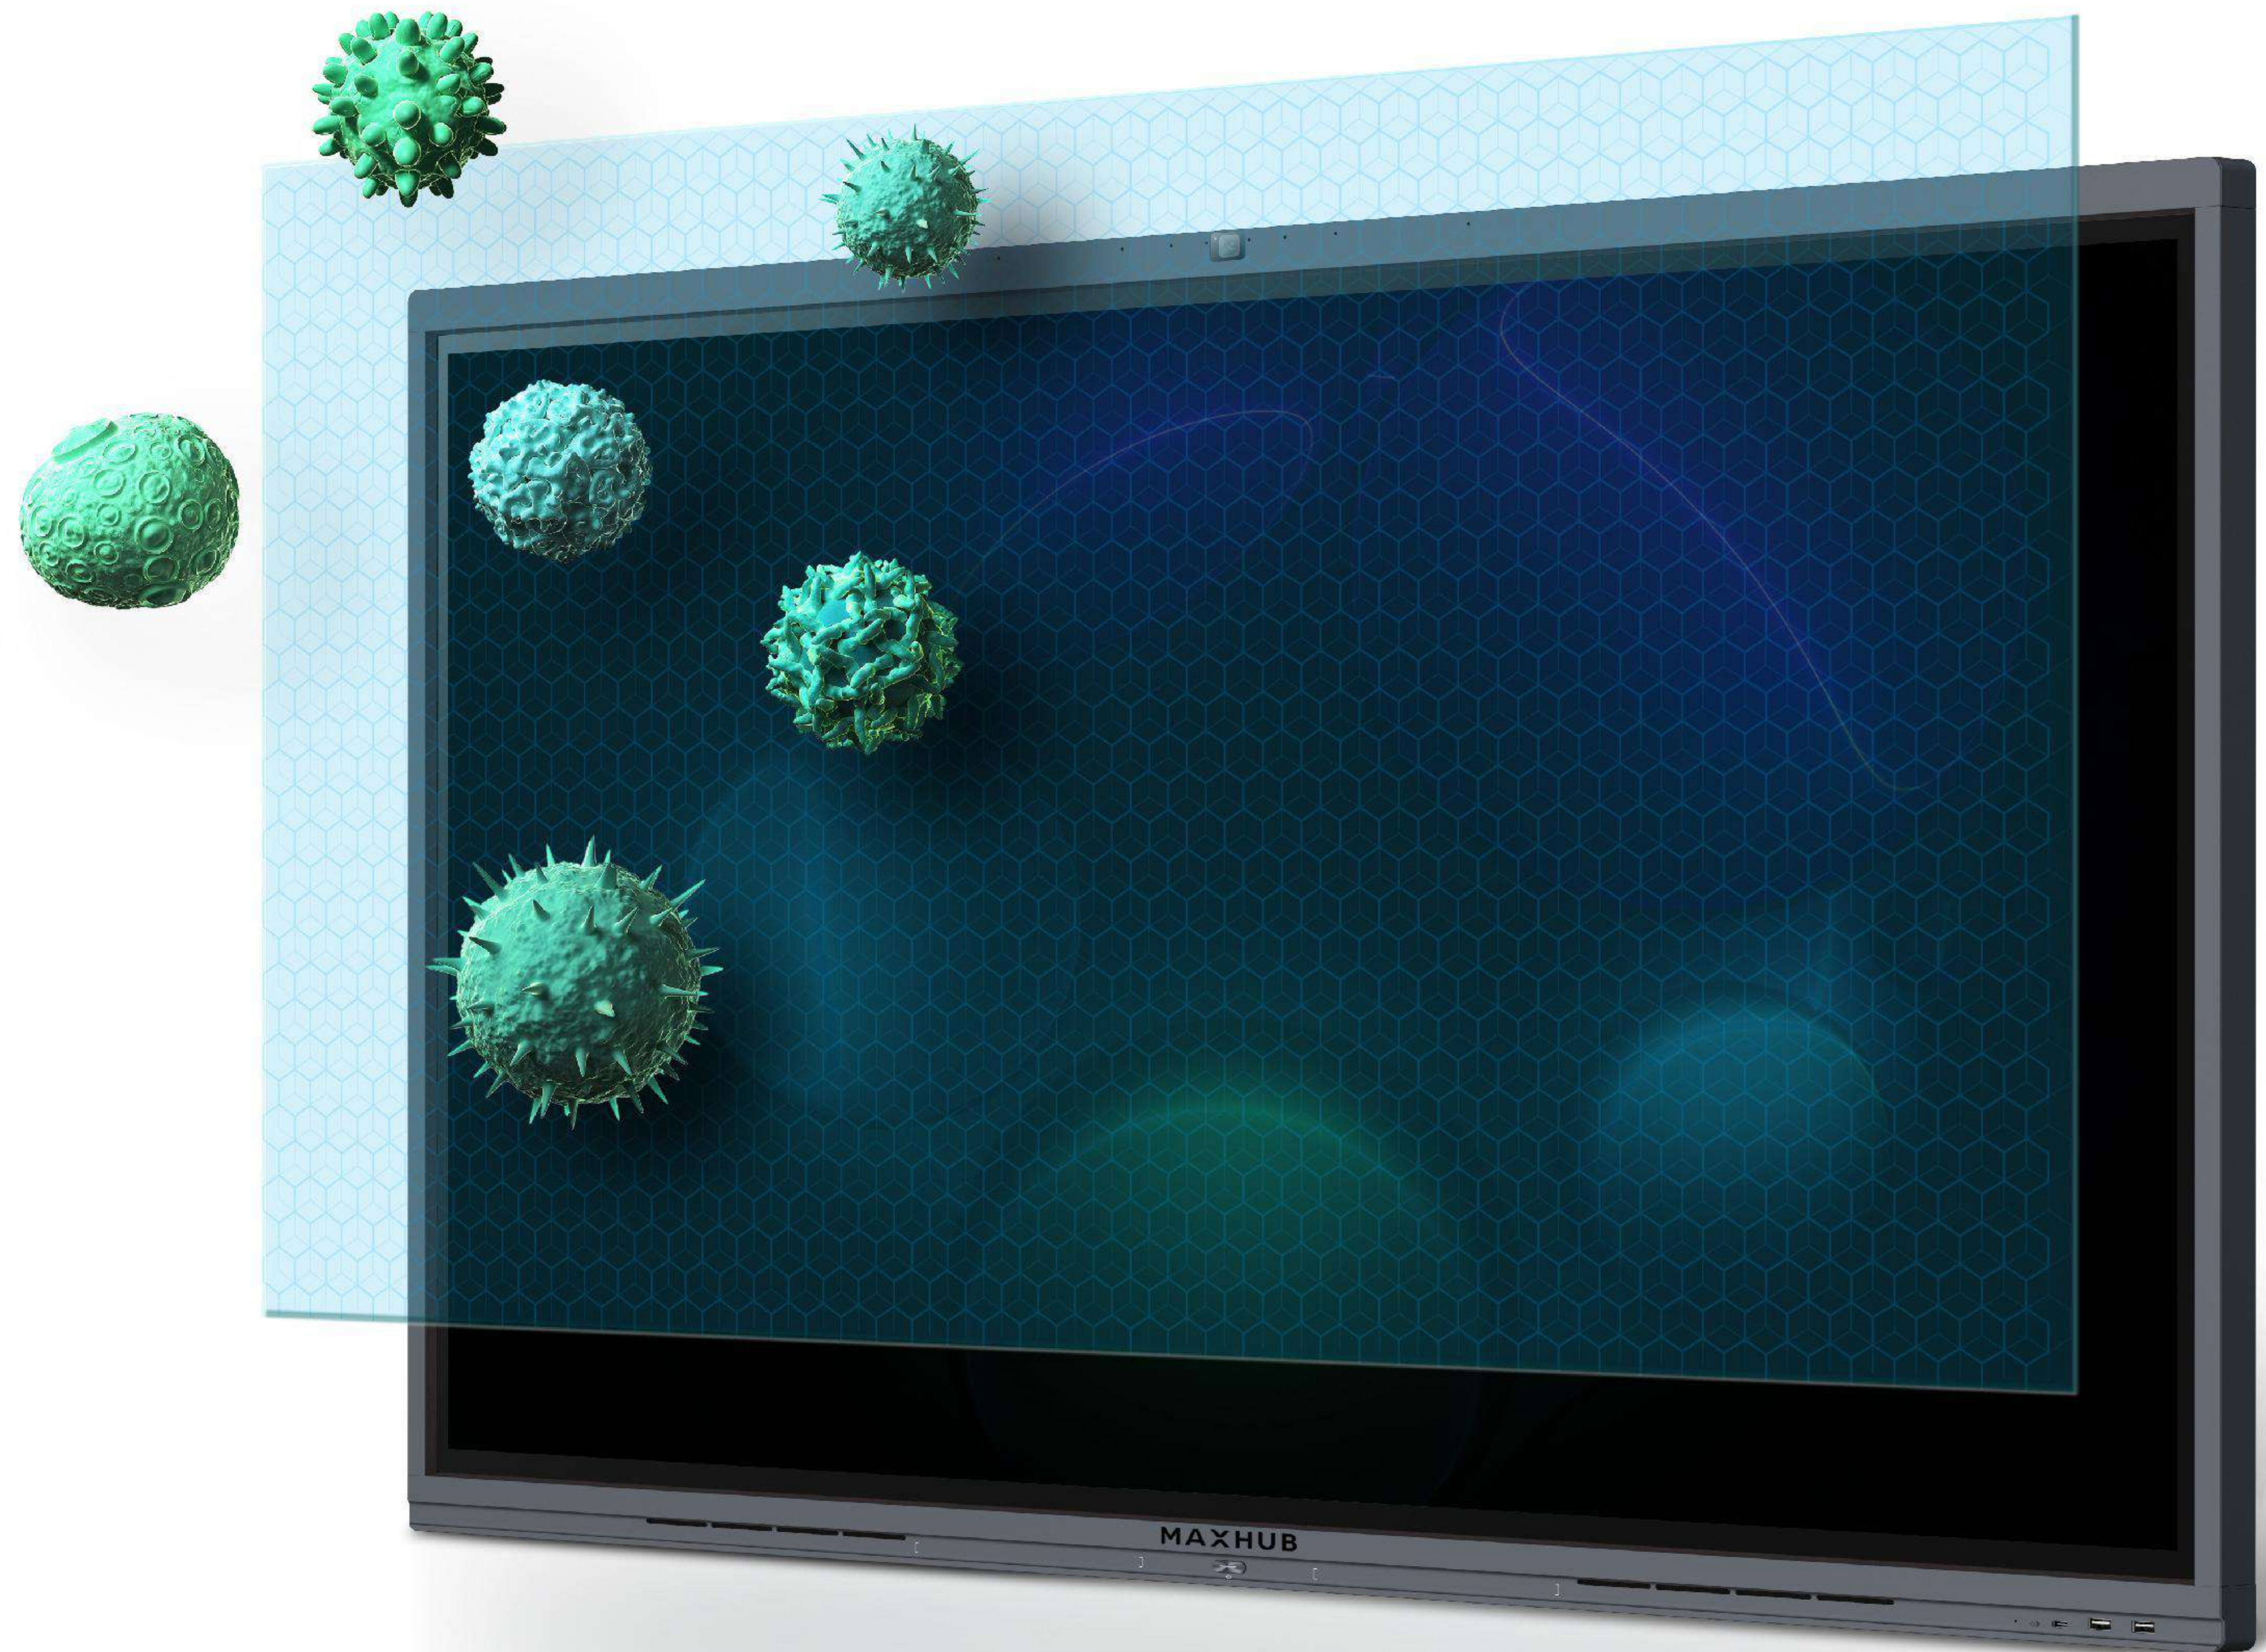




# Instant Device Access and Management

IT teams can easily access and manage all MAXHUB devices instantly through the cloud.


Remotely update device firmware, turn the screen on/off, install apps, deliver a message to all panels, and more using the pre-installed MAXHUB device-management app.

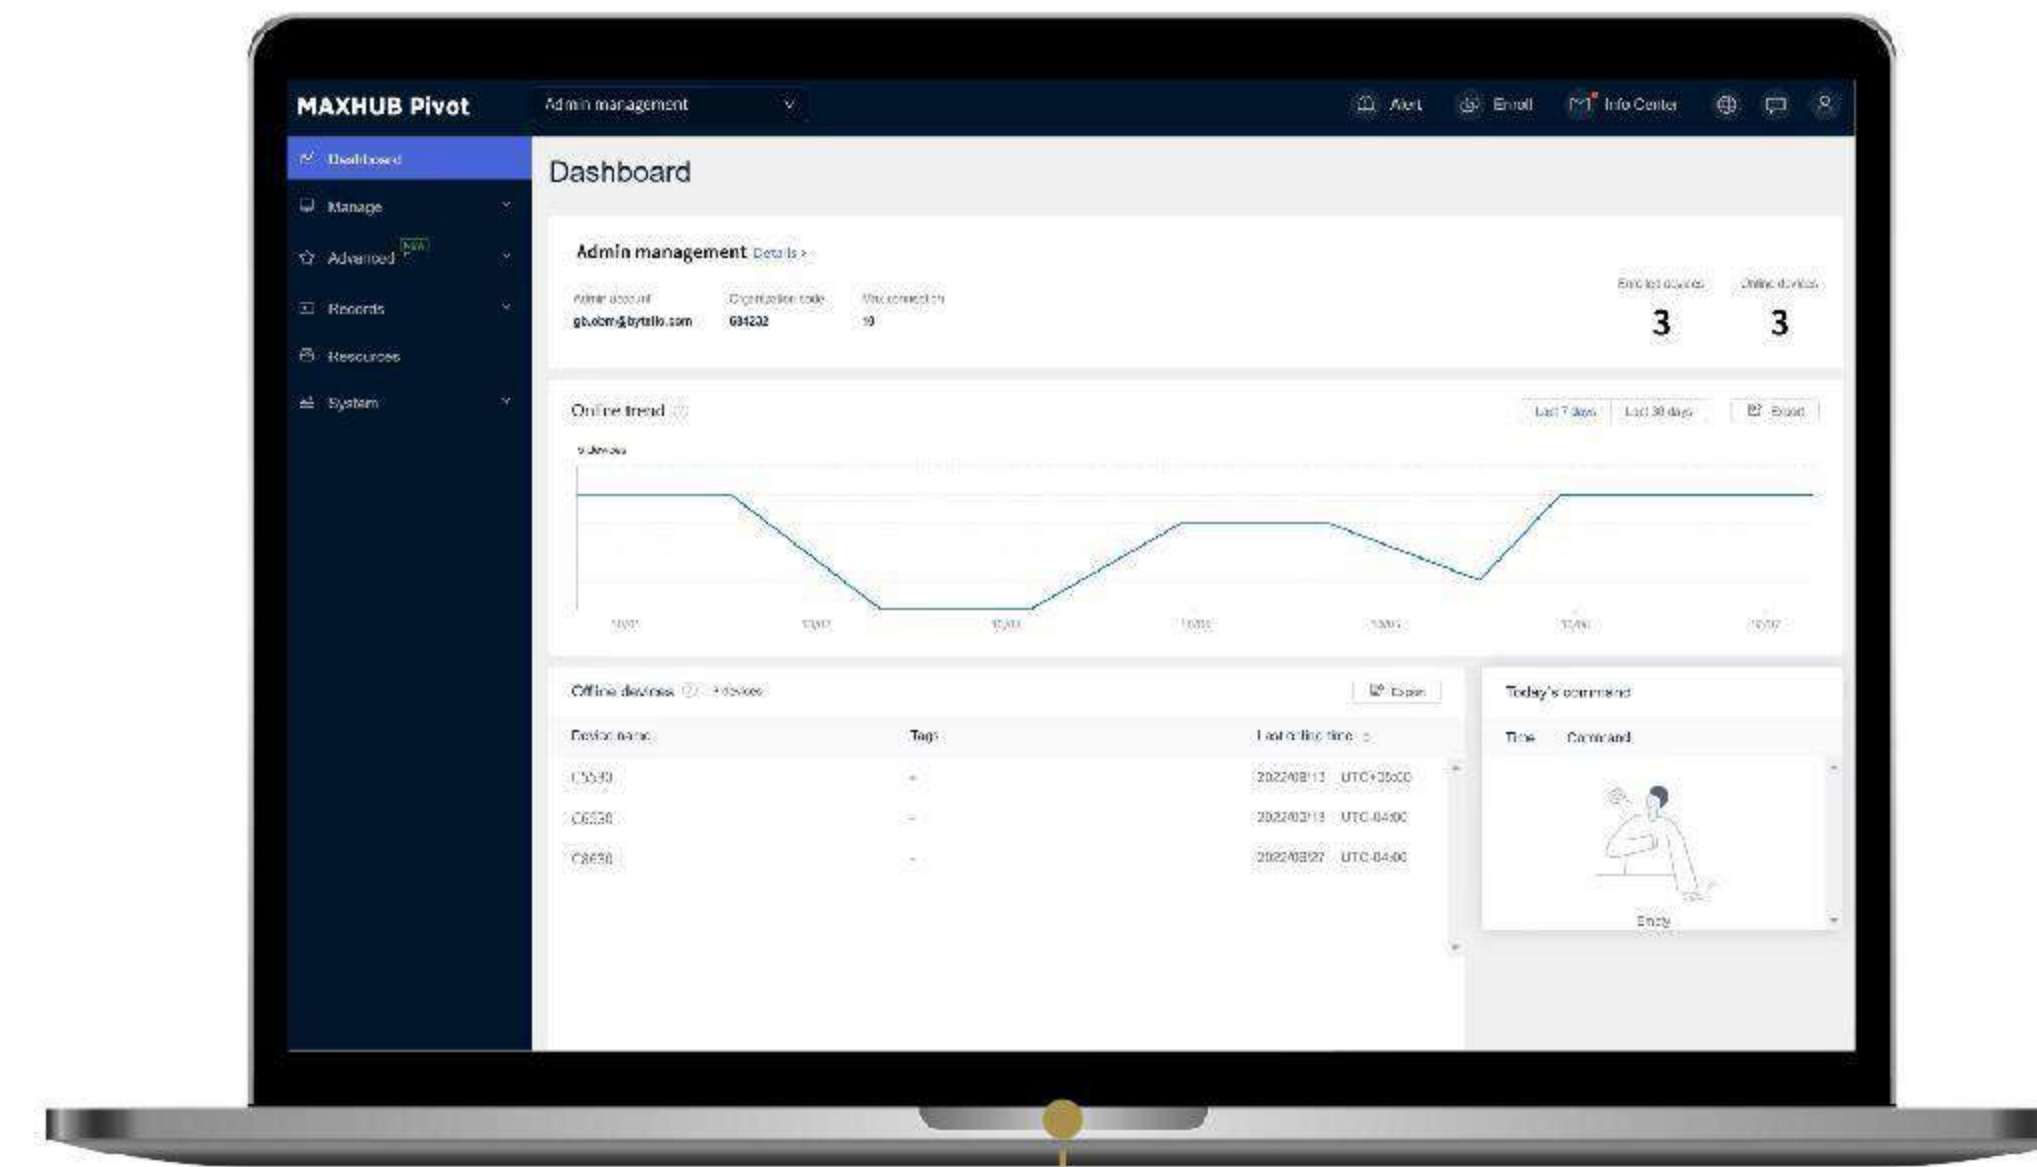



## Effortless Access with MAXHUB OS 6.0


MAXHUB OS 6.0 provides easy access to whiteboarding, video conferencing apps, and wireless projection. Users can personalize the customizable homepage for a tailored user experience, and join a scheduled meeting with just one click thanks to the integrated calendar design.

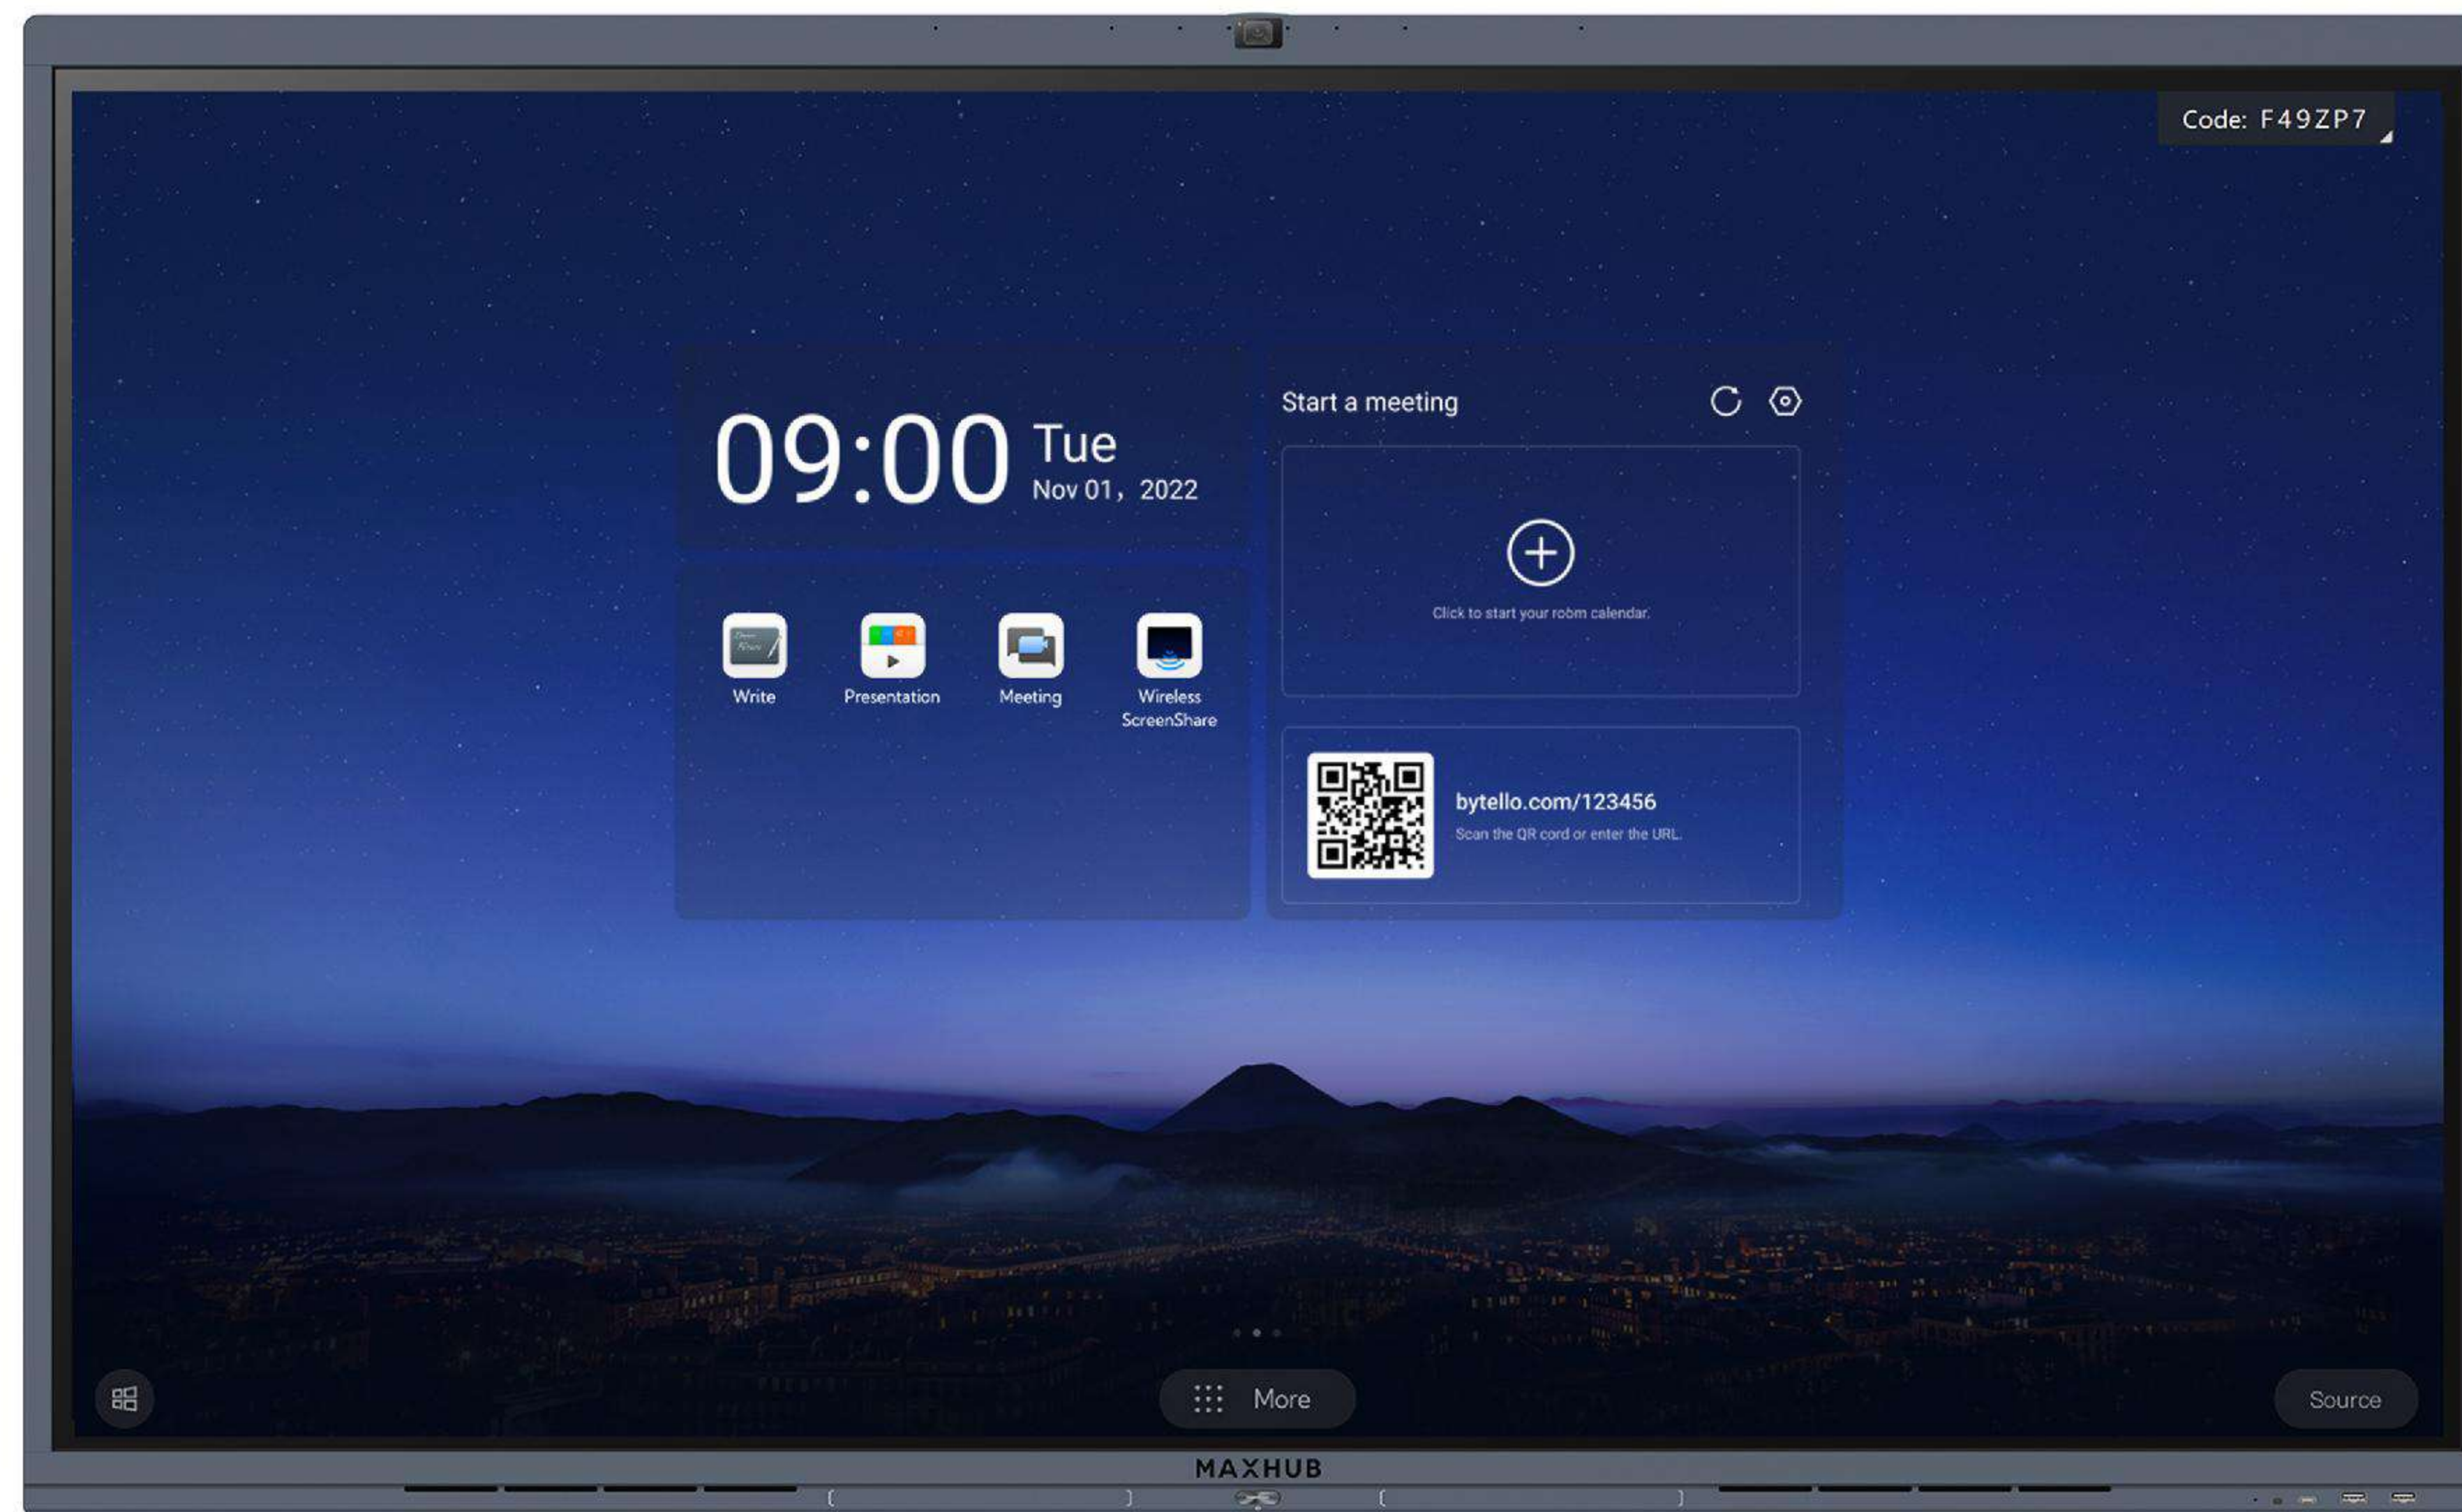



# Application Scenarios

- 01 Auditorium
- 02 Reception
- 03 Video-conferencing room
- 04 Open area

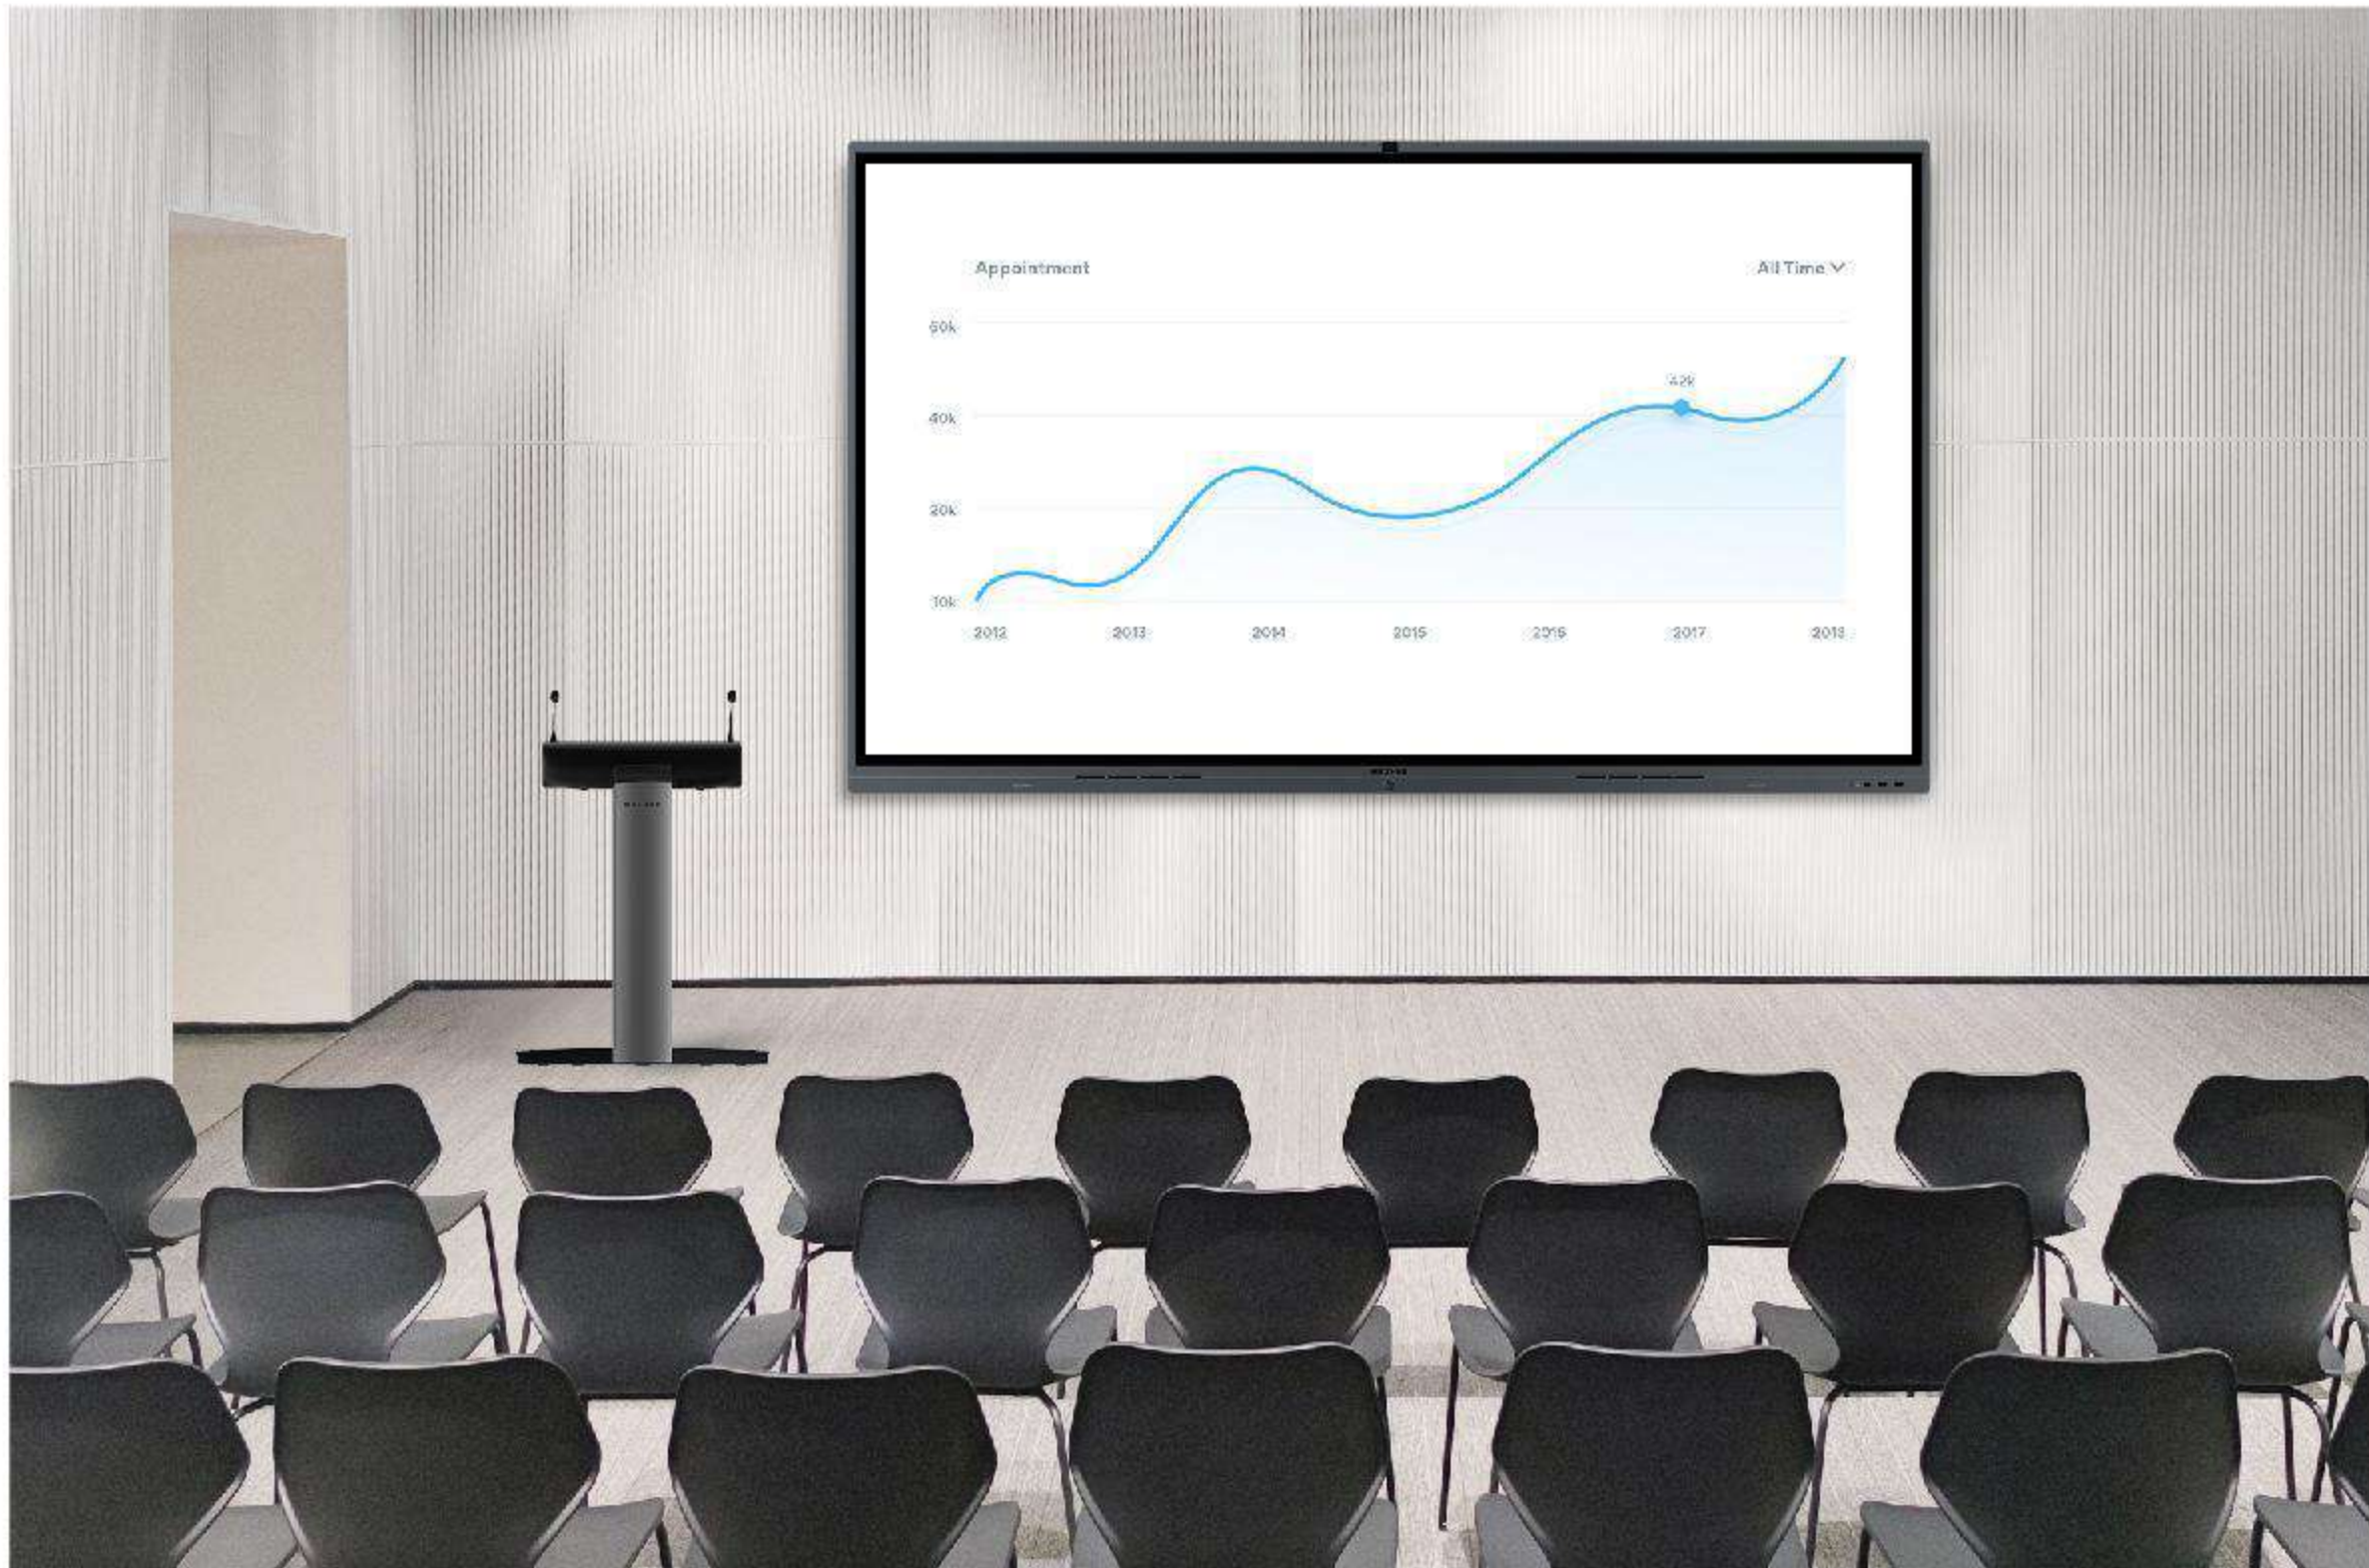



Specification

|                                          |                                                                            |                                                                            |                                                                            |                                                                            |
|------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Display                                  |                                                                            |                                                                            |                                                                            |                                                                            |
| Model                                    | C5530                                                                      | C6530                                                                      | C7530                                                                      | C8630                                                                      |
| Diagonal Size(inch)                      | 55                                                                         | 65                                                                         | 75                                                                         | 86                                                                         |
| Backlight                                | Direct-lit LED                                                             | Direct-lit LED                                                             | Direct-lit LED                                                             | Direct-lit LED                                                             |
| Panel Technology                         | IPS                                                                        | IPS                                                                        | VA                                                                         | VA                                                                         |
| Aspect Ratio                             | 16 : 9                                                                     | 16 : 9                                                                     | 16 : 9                                                                     | 16 : 9                                                                     |
| Resolution                               | 3840 x 2160                                                                | 3840 x 2160                                                                | 3840 x 2160                                                                | 3840 x 2160                                                                |
| Response Time                            | 8ms                                                                        | 8ms                                                                        | 8.5ms                                                                      | 8ms                                                                        |
| Refresh Rate                             | 60Hz                                                                       | 60Hz                                                                       | 60Hz                                                                       | 60Hz                                                                       |
| Brightness(typ)                          | 350cd/m²                                                                   | 350cd/m²                                                                   | 350cd/m²                                                                   | 350cd/m²                                                                   |
| Contrast Ratio                           | 1200 : 1                                                                   | 1200 : 1                                                                   | 5000 : 1                                                                   | 4000 : 1                                                                   |
| Viewing Angle                            | 178°/178°                                                                  | 178°/178°                                                                  | 178°/178°                                                                  | 178°/178°                                                                  |
| Color Gamut(typ)                         | 90% NTSC                                                                   | 90% NTSC                                                                   | 90% NTSC                                                                   | 90% NTSC                                                                   |
| Display Orientation                      | Landscape                                                                  | Landscape                                                                  | Landscape                                                                  | Landscape                                                                  |
| Operation Hour                           | 16/7                                                                       | 16/7                                                                       | 16/7                                                                       | 16/7                                                                       |
| Touch System                             |                                                                            |                                                                            |                                                                            |                                                                            |
| Touch                                    | IR Touch                                                                   | IR Touch                                                                   | IR Touch                                                                   | IR Touch                                                                   |
| Max Touch Points Supported               | 20                                                                         | 20                                                                         | 20                                                                         | 20                                                                         |
| Accuracy                                 | ±1mm                                                                       | ±1mm                                                                       | ±1mm                                                                       | ±1mm                                                                       |
| Object Recognition Range                 | ≥2mm                                                                       | ≥2mm                                                                       | ≥2mm                                                                       | ≥2mm                                                                       |
| Glass                                    | Zero parallax, 3mm Angi-glare, Antibacterial                               | Zero parallax, 3mm Angi-glare, Antibacterial                               | Zero parallax, 3mm Angi-glare, Antibacterial                               | zero parallax, 4mm Angi-glare, antibacterial                               |
| Supported Operating System(Touch Return) | Windows10/Windows8/Windows7/WindowsXP/<br>Android/Linux/Mac OS X/Chrome OS | Windows10/Windows8/Windows7/WindowsXP/<br>Android/Linux/Mac OS X/Chrome OS | Windows10/Windows8/Windows7/WindowsXP/<br>Android/Linux/Mac OS X/Chrome OS | Windows10/Windows8/Windows7/WindowsXP/<br>Android/Linux/Mac OS X/Chrome OS |
| Connectivity                             |                                                                            |                                                                            |                                                                            |                                                                            |
| Input                                    | HDMI IN x 1, USB 2.0 x 1, USB 3.0 x 2,<br>TOUCH 2.0 x 1, USB Type-C x 2    | HDMI IN x1, USB 2.0 x 1, USB 3.0 x 2,<br>TOUCH 2.0 x 1, USB Type-C x 2     | HDMI IN x 1, USB 2.0 x 1, USB 3.0 x 2,<br>TOUCH 2.0 x 1, USB Type-C x 2    | HDMI IN x1, USB 2.0 x 1, USB 3.0 x 2,<br>TOUCH 2.0 x 1, USB Type-C x 2     |
| Audio                                    | Audio out x 1                                                              | Audio out x 1                                                              | Audio out x 1                                                              | Audio out x 1                                                              |
| Control                                  | RS232 x 1                                                                  | RS232 x 1                                                                  | RS232 x 1                                                                  | RS232 x 1                                                                  |
| OPS Slot                                 | Yes, 3840 x 2160@60fps                                                     | Yes, 3840 x 2160@60fps                                                     | Yes, 3840 x 2160@60fps                                                     | Yes, 3840 x 2160@60fps                                                     |
| Camera&Audio&Microphone                  |                                                                            |                                                                            |                                                                            |                                                                            |
| Built-in Camera                          | Yes, Single Camera<br>48MP                                                 | Yes, Single Camera<br>48MP                                                 | Yes, Single Camera<br>48MP                                                 | Yes, Single Camera<br>48MP                                                 |
| Optical Zoom                             | No                                                                         | No                                                                         | No                                                                         | No                                                                         |
| Camera Features                          | Auto-Framing / Speaker-Tracking                                            | Auto-Framing / Speaker-Tracking                                            | Auto-Framing / Speaker-Tracking                                            | Auto-Framing / Speaker-Tracking                                            |
| Built-in Speakers                        | 2.1 channel, 10W x 2 + 20W                                                 | 2.1 channel, 10W x 2 + 20W                                                 | 2.1 channel, 10W x 2 + 20W                                                 | 2.1 channel, 10W x2+20W                                                    |
| Microphone Array                         | 8 x far-field, Beam-forming mic<br>Max 8m range                            | 8 x far-field, Beam-forming mic<br>Max 8m range                            | 8 x far-field, Beam-forming mic<br>Max 8m range                            | 8 x far-field, Beam-forming mic<br>Max 8m range                            |
| Power                                    |                                                                            |                                                                            |                                                                            |                                                                            |
| Power Supply                             | AC100-240V, 50/60Hz                                                        | AC100-240V, 50/60Hz                                                        | AC100-240V, 50/60Hz                                                        | AC100-240V, 50/60Hz                                                        |
| Max Power Consumption                    | 300W                                                                       | 350W                                                                       | 400W                                                                       | 400W                                                                       |
| Standby                                  | ≤0.5W                                                                      | ≤0.5W                                                                      | ≤0.5W                                                                      | ≤0.5W                                                                      |
| Features                                 |                                                                            |                                                                            |                                                                            |                                                                            |
| Ambient Light Sensor                     | Yes                                                                        | Yes                                                                        | Yes                                                                        | Yes                                                                        |
| Energy Star                              | No                                                                         | No                                                                         | No                                                                         | No                                                                         |